


KD-DA1x2 KD-DA1x4 KD-DA1x8

HDMI Distribution Amplifiers,
support Ultra HD/4K & HDCP 2.2

Operating Instructions

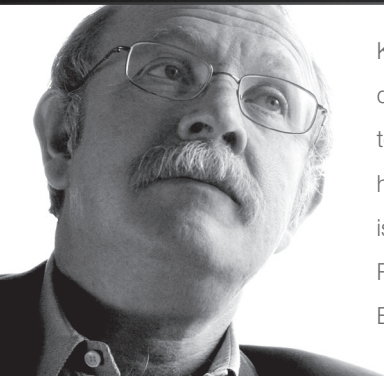


Key Digital®, led by digital video pioneer Mike Tsinberg, develops and manufactures high quality, cutting-edge technology solutions for virtually all applications where high-end video and control are important. Key Digital® is at the forefront of the video industry for Home Theater Retailers, Custom Installers, System Integrators, Broadcasters, Manufacturers, and Consumers.



KD-DA1x2



KD-DA1x4



KD-DA1x8

Key Digital® Systems :: 521 East 3rd Street :: Mount Vernon, NY 10553
Phone : 914.667.9700 Fax : 914.668.8666 Web : www.keydigital.com

Key digital®

The Experts in Digital Video Technology and Solutions™

Table of Contents

Introduction	1
Quick Setup Guide	2
Installation and Operation	3
EDID Control	3
Hot Plug Control	4
Specifications	5
Important Product Warnings & Safety Instructions:	6
How to Contact Key Digital®.	7
Warranty Information	7

Introduction

Key Digital® KD-DA1x2/1x4/1x8 HDMI Distribution Amps are designed and engineered to offer the best in quality, performance, and reliability, while providing a cost-effective HDMI distribution solution. The KD-DA1x2/1x4/1x8 provide one input to multiple outputs HDMI distribution without signal degradation. KD-DA1x2/1x4/1x8 HDMI Distribution Amps support all SD, HD, VESA and Ultra HD/4K video standards, including UHD/4K, 1080p/60, 1920x1200, 3D and support of HDCP 2.2 and HDR.

Key Features

- › **Digital Distribution:** 1 HDMI Sources to 2/4/8 HDMI Displays
- › **Resolution Support:** SD, HD, and VESA up to UHD/4K
- › **Ultra HD/4K Resolution:** 4096x2160 or 3840x2160 30Hz at 4:4:4 and 60Hz at 4:4:4
- › **HDCP 2.2:** Compliancy up to HDCP 2.2 and backward compliant
- › **Deep Color Support:** Up to UHD/4K 30Hz 4:4:4/12 bits or 60Hz 4:4:4/8 bit
- › **3D Ready:** Capability to pass 3D stereoscopic signal formats
- › **HDR:** Supports High Dynamic Range technology with EDID copy from HDR supporting display
- › **EDID Control:** Internal library with 15 EDID handshakes in addition to native EDID data of output/display 1
- › **Full Buffer™ System:** Manages TMDS re-clocking / signal re-generation, HDCP source & display authentication, Hot Plug Management and EDID Control handshake
- › **Lossless Compressed Digital Audio:** Dolby® TrueHD, Dolby® Digital Plus and DTS-HD Master Audio™ and Dolby® Atmos
- › **Deep Color Support:** Up to 12 Bit at UHD/4K 24/25/30Hz 4:4:4
- › **HDMI and HDCP Licensing:** Fully licensed and compatible with HDCP 2.2 and HDMI
- › **I2C Communication:** EDID and HDCP buffering from Display to Source
- › **CEC Disconnect:** Prevents all device communication signals via CEC, ARC, and HDMI Ethernet channels


Accessories

- › KD-DA1x2/1x4 Power Supply: KD-PS5V1ASC, 5V/1A, 100-240VAC, 50-60Hz, Interchangeable head, screw-type connector
- › KD-DA1x8 Power Supply: KD-PS5V3A, 5V/3A, 100-240VAC, 50-60Hz, Interchangeable head, screw-in connector
- › Mounting Brackets

**Always follow the instructions provided in this Operating Manual.
Please check the Key Digital Website for the most up-to-date Manual.**

Quick Setup Guide

- Step 1:** Find a safe and convenient location to mount or place KD-DA1x2/1x4/1x8 unit
- Step 2:** Begin with the KD-DA1x2/1x4/1x8 unit and all input/output devices turned off with power cables removed
- Step 3:** Connect your HDMI source to the input port of KD-DA1x2/1x4/1x8 unit
- Step 4:** Connect your HDMI displays to the output port of KD-DA1x2/1x4/1x8 unit
- Step 5:** **BEFORE** connecting power supply to power outlet, screw-in the power supply to the KD-DA1x2/1x4/1x8 unit
- Step 6:** **AFTER** all connections are made, plug-in power supply to power outlets
- Step 7:** Power on input/output devices

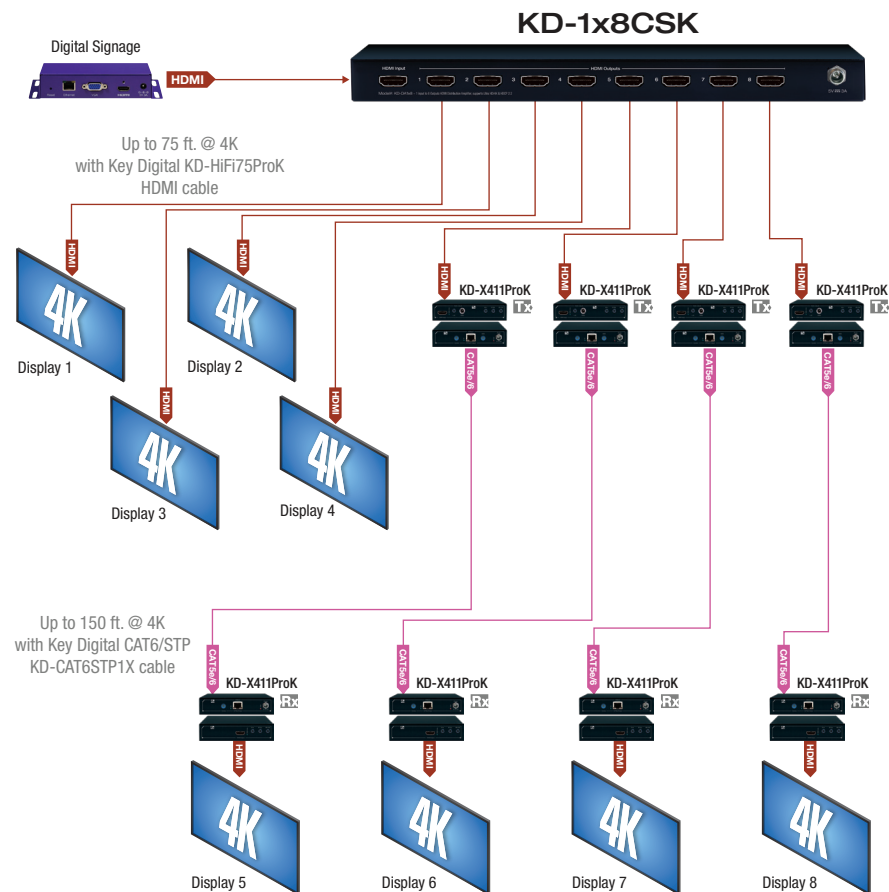


Installation and Operation

Before permanently securing the unit for final installation, test for proper operation of the unit and cables in your system. It is recommended that you leave enough ventilation space to provide sufficient airflow and cooling.

Active Input / Output LED Indicators

The front LED indicators indicate that a valid HDMI connection is made between the KD-DA1x2/1x4/1x8 unit and each Input / Output.

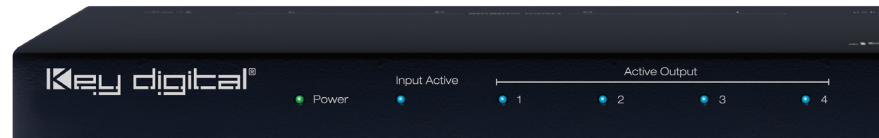

Active Output

- » Color: **Blue**
- » Solid illumination during active HPD (voltage) link with connected HDMI output device


Input Active

- » Color: **Blue**
- » Solid illumination during active link (voltage + data) with connected HDMI source
- » Steady blink (once per second) if signal is not present

EDID Control

EDID (Extended Display Identification Data) is a data structure provided by a digital display to describe its capabilities to a video source. This data is also known as a "handshake" and typically includes manufacturer, serial number, product type, resolutions supported by the display, display size, pixel mapping data, etc.

Key Digital EDID Control allows the integrator to choose the handshake that will be provided to source devices of the system. The EDID handshake is relayed to the source from the distribution amplifier, or from output/display 1 (default setting). This handshake will always be the EDID information that the source device receives.



Rotary EDID Control Switch

The possible EDID settings can range from '00' to '15'. ('00' is the default).

00	Copy EDID from HDMI Output 1 (Default)
01	1080i@60, 2Ch PCM Audio
02	1080i@60, Dolby/DTS 5.1 Audio
03	1080i@60, HD Audio
04	1080p@60, 2Ch Audio
05	1080p@60, Dolby/DTS 5.1 Audio
06	1080p@60, HD PCM Audio
07	4Kx2K@30, 2Ch Audio
08	4Kx2K@30, Dolby/DTS 5.1 Audio
09	4Kx2K@30, HD Audio
10	4Kx2K@60, 2Ch PCM Audio
11	4Kx2K@60, Dolby/DTS 5.1 Audio
12	4Kx2K@60, HD PCM Audio
13	1280x720p@60 DVI
14	1920x1080p@60 DVI
15	3840x2160p@60 DVI



Hot Plug Control

Hot Plug Detection (HPD) may be forced in order to provide the connected input/source with the necessary voltage to inform the device that an output/display is connected and active. If the Forced HPD switch is set to OFF, HPD signals to the input device will pass as normal. In cases of many layers

of connectivity, HPD may be lost leading to no signal at the display. In those cases, fix the Forced HPD switch to the ON setting.

Specifications

Technical:

- » Input: HDMI Connector, Type A, 19 Pin Female
- » Output (Each): HDMI Connector, Type A, 19 Pin Female
- » Bandwidth: TMDS bandwidth 10.2 Gb/s
- » Deep Color Support: Digital video formats in Deep Color Mode up to 12 bits/color
- » DDC Communication: EDID and HDCP Bi-directional buffering from Display to Source
- » KD-DA1x2/1x4 Power Supply: KD-PS5V1ASC, 5V/1A, 100-240VAC, 50-60Hz, Interchangeable head, screw-in connector
- » KD-DA1x8 Power Supply: KD-PS5V3A, 5V/3A, 100-240VAC, 50-60Hz, Interchangeable head, screw-in connector

General:

- » Regulation: CE, RoHS, WEEE
- » Enclosure: Black Metal
- » Product Dimensions: KD-DA1x2 - 4.9" x 2.5" x .55"
KD-DA1x4 - 6.9" x 3.25" x .55"
KD-DA1x8 - 10.89" x 4.01" x 0.88"
- » Packaging Dimensions: KD-DA1x2 - 6.5" x 4.3" x 3.4"
KD-DA1x4 - 8.25" x 4.75" x 3.6"
KD-DA1x8 - 15.7" x 5.3" x 2.28"
- » Product Weight: KD-DA1x2 - 0.5 lb
KD-DA1x4 - 0.8 lb
KD-DA1x8 - 1.5 lb
- » Shipping Weight: KD-DA1x2 - 0.9 lb
KD-DA1x4 - 1.4 lb
KD-DA1x8 - 2.0 lb



Important Product Warnings:

1. Connect all cables before providing power to the unit.
2. Test for proper operation before securing unit behind walls or in hard to access spaces.
3. If installing the unit into wall or mounting bracket into sheet-rock, provide proper screw support with bolts or sheet-rock anchors.



Safety Instructions:

Please be sure to follow these instructions for safe operation of your unit.

1. Read and follow all instructions.
2. Heed all warnings.
3. Do not use this device near water.
4. Clean only with dry cloth.
5. Install in accordance with the manufacturer's instructions.
6. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
7. Only use attachments/accessories specified by the manufacturer.
8. Refer all servicing to qualified service personnel. Servicing is required when the device has been damaged in any way including:
 - » Damage to the power supply or power plug
 - » Exposure to rain or moisture



Power Supply Use:

You **MUST** use the Power Supply **provided** with your unit or you **VOID** the Key Digital® Warranty and risk damage to your unit and associated equipment.

How to Contact Key Digital®

System Design Group (SDG)

For system design questions please contact us at:

- › Phone: 914-667-9700
- › E-mail: sdg@keydigital.com

Customer Support

For customer support questions please contact us at:

- › Phone: 914-667-9700
- › E-mail: customersupport@keydigital.com

Technical Support

For technical questions about using Key Digital® products, please contact us at:

- › Phone: 914-667-9700
- › E-mail: tech@keydigital.com

Repairs and Warranty Service

Should your product require warranty service or repair, please obtain a Key Digital® Return Material Authorization (RMA) number by contacting us at:

- › Phone: 914-667-9700
- › E-mail: rma@keydigital.com

Feedback

Please email any comments/questions about the manual to:

- › E-mail: customersupport@keydigital.com

LIMITED
10 YEAR
WARRANTY

Warranty Information

All Key Digital® products are built to high manufacturing standards and should provide years of trouble-free operation. They are backed by a Key Digital Limited 10 Year Product Warranty Policy.

<http://www.keydigital.com/warranty.htm>

