

KRAMER



Installation Instructions

MODELS:

CLS-AOCH/xl (Low Smoke Version)

CP-AOCH/xl (Plenum Version)

Fiber Optic High Speed Pluggable HDMI Cable



P/N: 2900-300532



Rev: 3



SAFETY WARNING

Disconnect the unit from the power supply before opening and servicing

For the latest information on our products and a list of Kramer distributors, visit our Web site where updates to this user manual may be found.

We welcome your questions, comments, and feedback.

www.kramerAV.com

info@kramerel.com

CLS-AOCH/xl / CP-AOCH/xl Fiber Optic High Speed Pluggable HDMI Cable

Congratulations on purchasing your Kramer **CLS-AOCH/xl / CP-AOCH/xl** Plug and Play active Fiber Optic High Speed Pluggable HDMI Cable which is suited for critical and versatile installations.

The **CLS-AOCH/xl / CP-AOCH/xl** provides an extremely high quality signal over a wide range of resolutions, up to 4K@60Hz (4:2:0) / 4K@ 30Hz (4:4:4). This cable is available in different lengths from 33ft (10m) to 328ft (100m).

The **CLS-AOCH/xl / CP-AOCH/xl** has a slim design to let you pull the cables easily (together with the supplied pulling tool) through small-sized conduits.



Figure 1: HDMI Connector plugs (Source and Display)

The **CLS-AOCH/xl / CP-AOCH/xl** is ideal for long distance transmission in professional AV systems, indoor and outdoor digital signage and kiosks, home theater systems, surgical theaters, facility automation systems and whenever high resolution video and audio are required.

Features

The **CLS-AOCH/xl / CP-AOCH/xl**:

- Supports a wide range of resolutions up to 4K@60Hz (color space 4:2:0) and 4K@30Hz (color space 4:4:4) Full HD, 3D, Deep Color
- Supports Multi-channel audio, Dolby True HD, DTS-HD Master Audio
- Is HDMI compliant: EDID, CEC, HDCP
- Features K-Lock Pull-Resistant Connectors that provide 15lbs of restraining force for a non-slip connection
- Reduced EMI and RFI
- Has built-in powering with low power consumption
- Includes a micro USB port to connect to an external 5V power supply (mostly on the display side)
- Has high pulling strength and compression load
- Has Source / Display clearly printed on the connector as well as tagged on the cable for easy identification

Cable Dimensions

The **CLS-AOCH/xl / CP-AOCH/xl** includes four optical fibers and six AWG 28 wires with compact size HDMI connectors. On the source side, the micro HDMI connector enables smooth pulling of the cable. The SOURCE end connects to the source (for example, a DVD, Blu-ray or game console box) and the DISPLAY end to the acceptor (for example, a projector, an LCD display or a tablet device), see [Figure 2](#) (note that SOURCE appears here as an example).

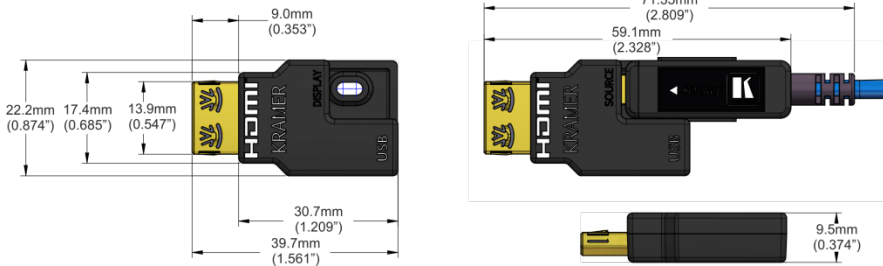


Figure 2: HDMI Connectors – SOURCE and DISPLAY (with Dimensions in mm)

CLS-AOCH/xl / CP-AOCH/xl Plug and Play Installation

Before installing the cable, make sure that you have an HDMI graphic card or devices with an HDMI port (for example, a PC, laptop, DVD/Blue-ray player or any other video/audio signal source device).



Optical fiber cable is not robust physically compared to conventional copper cable materials. Even though this cable is designed to be resistant to artificial strengths on the cable, **CLS-AOCH/xl / CP-AOCH/xl** can be damaged if it is excessively pinched, twisted or kinked when being installed and after being installed. **Take care not to bend or twist the cable tightly.**

When **CLS-AOCH/xl / CP-AOCH/xl** is installed into the conduit, the fiber pulling strength and the bending radius are the key conditions to safe installation of the cable.

Do not disassemble or modify the products, especially the HDMI connector head parts.

To install the **CLS-AOCH/xl / CP-AOCH/xl**:

1. Unpack the cable from the package with care and remove the cable tie.
2. Place the micro-HDMI (Type D) connector inside the Pulling Tool and close its cover.



Note that you can pull the cable either from the display side or the source side (as shown in [Figure 3](#)), but you have to make sure that the cable polarity is correct (tagged Source if pulling the source side or Display if pulling the display side).

3. Attach the pulling cable to the Pulling Tool.



Figure 3: Attaching the Pulling Tool

4. Carefully install the cable (for example, in the wall or conduit or under the floor).

5. Once the cable installation is complete, plug the SOURCE connector head of the cable into the source devices.
Do not plug the SOURCE connector to the display device.
6. Plug the DISPLAY connector head of the cable into the display devices.
Do not plug the DISPLAY connector to the source device.
7. Switch on the power of the source and display devices.
8. If required, connect an external power source via the micro USB connector on the **Display** side.

Troubleshooting

If you have encountered a problem, check that:

- The source and display devices are both switched on
- Both HDMI connector heads are fully plugged into the devices
- The cable or its jacket is not physically damaged
- The cable is not bent or kinked



Note that it is important to connect the cable correctly as marked on the end of each connector: SOURCE to the source side and DISPLAY to the acceptor side.

Specifications

Audio and Power	
VIDEO RESOLUTION:	4K@60Hz (4:2:0), 4K@30Hz (4:4:4), 1080p Full HD Deep Color 48bit, 3D
EMBEDDED AUDIO SUPPORT:	PCM 8ch, Dolby Digital True HD, DTS-HD Master Audio
HDMI COMPLIANCE:	HDCP 2.2, EDID, CEC
Cable Assembly	
HDMI CONNECTOR:	Male HDMI Type A Connector
DIMENSIONS:	Micro HDMI port: 1.23cm x 4.9cm x 0.8cm (0.484" x 1.93" x 0.31") W, D, H Type A HDMI port: 3.1cm x 4cm x 0.95cm (1.22" x 1.57" x 0.37") W, D, H Assembly: 2.22cm x 7.1cm x 0.99cm (0.874" x 2.79" x 0.39") W, D, H
CABLE STRUCTURE:	Hybrid Optical Fiber Cable
CABLE JACKET MATERIAL:	UL Plenum (CMP-OF) and LSHF (Low Smoke Halogen Free)
CABLE JACKET COLOR:	UL Plenum: gray; LSHF: blue
CABLE DIAMETER:	3.4mm
CABLE BENDING RADIUS:	6mm
CONNECTOR MAX. PULLING STRENGTH:	100N (10kg, 22lbs)
CABLE PULLING STRENGTH:	500N (50kg, 110lbs)
MICRO USB CABLE	External 5V power supply cable (for optional use)
Power	
POWER SUPPLY HDMI:	Draws current from the source. If required, power can be also supplied from an external USB connector on the display side.
POWER CONSUMPTION:	0.25W max.
General	
OPERATING TEMPERATURE:	0° to +50°C (32° to 122°F)
STORAGE TEMPERATURE:	-30° to +70°C (-22° to 158°F)
OPERATING HUMIDITY:	5% to 85%, RHL non-condensing
AVAILABLE SIZE:	33ft (10m), 50ft (15m), 66ft (20m), 98ft (30m), 131ft (40m), 164ft (50m), 197ft (60m), 230ft (70m), 262ft (80m), 295ft (90m) and 328ft (100m)