

DV-HDA-15

HDMI Distribution Amplifier




Connect with Confidence

The DV-HDA-15, HDMI Distribution Amplifier, allows one HDMI source such as a Blu-ray, Set-top Box, or PC to be sent to five digital displays.

The DV-HDA-15 is HDMI V1.3 compliant and supports resolutions up to 1080p @ 60Hz with 36-bit color depth, Dolby®True HD, DTS-HD.

While complying with HDCP (High-bandwidth Digital Content Protection) V2.1 at all output channels, a signal from a single source can be sent simultaneously to several displays.

The built-in amplification function enables HDMI signal distribution without signal loss.

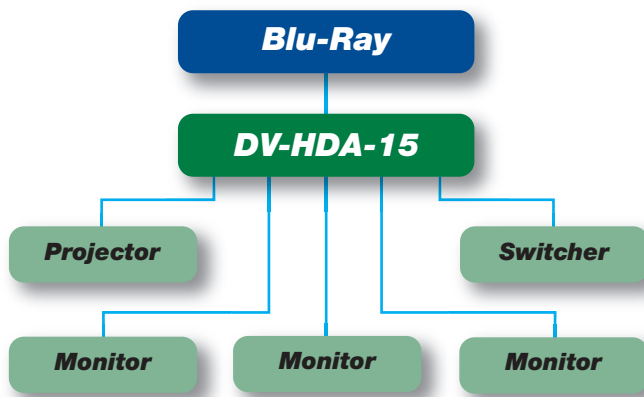

APPLICATIONS

- Video Wall System
- Large LED Sign Board
- Medical Imaging Equipment
- TV Broadcast Station
- Auditorium
- Conference Room
- Church Video System

FEATURES

- HDMI V1.3
- HDCP V2.1
- High Quality Picture - No Signal Loss and Digital Noise Free
- Signal Amplification for signal reliability and long length signal transmission.
- EDID Selectable for Non-Standard Displays
- LCD for Resolution Feedback and Setup
- LED Feedback for Signal Verification

SPECIFICATIONS

- Bandwidth: 25-165Mhz
- HDTV Resolutions: 480p, 720p, 1080i/p
- VESA Standard Resolutions to UXGA (1600 x 1200) @ 60Hz
- Input Channel: 1
- Output Channels: 5
- Signals & Connectors: Input & Output HDMI Type A Single Link Connector
- Power Supply: DC 12V/3.0A Included.
- Power Consumption: 6 Watt
- Operating Temperature: 0-40°C
- Humidity: Less than 80%
- Dimension (WxDxH):
12.25in (311mm) x 5.7in (145mm) x 1.02in (26mm)
- Weight: 1.25 lb (1.2 kg)



Specifications are subject to change without notice.

FSR Inc.

244 Bergen Boulevard, Woodland Park, NJ 07424
 Phone: 973.785.4347 · Fax: 973.785.4207
 Order Desk: 1-800-332-FSR1
 Web: www.fsrinc.com · E-mail: sales@fsrinc.com