


DL-HDCP-C Technical Specifications

HDCP 2.2 to HDCP 1.4 Converter
 Rev 151119

The DigitalLinx DL-HDCP-C is a 1x1 HDMI converter that features high-definition HDMI transmission and HDCP conversion. The DL-HDCP-C HDMI input supports HDMI 2.0 & HDCP 2.2 along with HDMI output support of HDMI 1.4 & HDCP 1.4. The DL-HDCP-C transmits signal up to 15m with a max resolution support of 4kx2k@60Hz. The EDID bypass feature ensures the best resolution for the application. The DL-HDCP-C is a Plug and Play device which allows for a hassle free install.

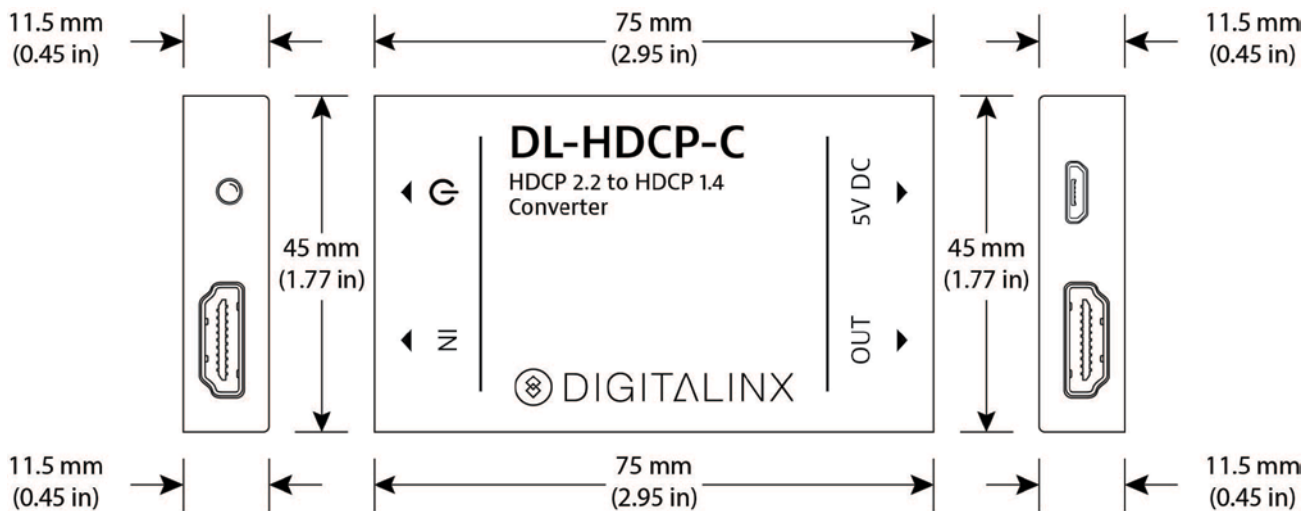

Technical Specifications

Input Connections	
Video Input	One (1) HDMI
Input Connector	19-pin Type A female HDMI
HDMI Standard	HDMI 1.4, HDMI 2.0 & HDCP 2.2
Output Connections	
Outputs	One (1) HDMI
Output Connector	19-pin Type A female HDMI
HDMI Standard	HDMI 1.4 & HDCP 1.4
Video Performance	
Video Resolution & Transmission Distance	Up to 1080p / 20m and 4Kx2K@60Hz / 15m
Bandwidth	18Gbps
Audio Format	PCM, Dolby Digital, DTS, DTS-HD, DTS-ES
Audio Sampling Rate	32k, 44.1k, 48k, 88.2k, 96k, 176.4k, 192k
EDID Management	Support pass-through EDID
Chassis and Environmental	
Enclosure Dimensions (W x H x D)	45.5 mm x 12 mm x 75 mm (1.79 in x 0.47 in x 2.95 in)
Shipping Weight	(49g) 0.10lbs
Operating Temperature	0°C to + 50°C (+32° to + 122° F)
Storage Humidity	10% to 90%, Non-condensing
Power and Regulatory	
Power Supply Input	100V-240VAC / 50-60 Hz
Power Supply Output	5VDC / 1 A
Power Consumption	0.5watts
Product Regulatory	FCC, CE
Other	
Warranty	2 years
Diagnostic Indicator	Power
Included Accessories	(1) Power Supply, Installation Guide, (2) Mounting Ears, (2) Screws and (4) Plastic Cushions