

Essential performance. Enticingly priced.

NEC E Series



LED-Backlit, 4K UHD LCD Displays Ideal for Education, Corporate and Digital Signage Applications

Highlights

The Essentials

With a brilliant 4K UHD* panel and simplified controls, the NEC E Series delivers everything you need for captivating digital signage.

- Integrated USB Media Player allows for playback of video, audio and picture files and additional USB Port for 5V/3A power delivery
- Ultra high definition panel (3840 x 2160)* and high contrast ratio with local dimming provides stunning imagery.
- Built-in tuner allows for high-definition broadcast capabilities
- Integrated LAN port for network control over IP
- 3-year warranty protects your investment
- Supports Audio/Video Mute Setting, and can also be muted individually
- External Power Supply at USB-C (5V/3A Max) for direct connection to external IoT devices such as Raspberry Pi using a USB-C cable***

The Extras

Delivering more than just the basics, the NEC E Series has integrated features that will leave no head unturned

- LED backlighting enables eco-friendly digital signage
- Simple 24-hour scheduler feature allows for programmable on/off times
- Multiple HDMI ports enhance best-in-class connectivity
- Internal, 10W** down-firing stereo speakers enhance the experience with superior sound
- Ability to wake the display simply by plugging HDMI or VGA into the unit
- Tilt Installation (-10°~10°) The display can be tilted back and forth to install it at desired angle
- Embedded Joystick key for an intuitive operation by showing key guidance on screen

*E328 has FHD (1920 x 1080) resolution

**E328 has integrated 5W x 2 down-firing speakers

*** When using this function, "Power Supply" has to be set to [ON] in OSD

4K UHD




MODEL	E328	E438	E498	E558	E658	
LCD MODULE	Panel Technology	IPS				
	Viewable Image Size	31.5"	42.5"	48.5"	54.6"	64.5"
	Native Resolution	1920 x 1080	3840 x 2160			
	Brightness (Typical/Minimum)	350 cd/m ² / 320 cd/m ²				
	Contrast Ratio (Typical)	8,000:1 (Out of the box conditions, local dimming ON)				
	Viewing Angle	178° Vert., 178° Hor. (89U/89D/89L/89R)				
	Aspect Ratio	16:9				
	Displayable Colors	16.7 Million	Over 1.07 Billion			
CONNECTIVITY	Orientation	Landscape				
	Input Terminals	HDMI x3 (2.0)*				
	Digital	VGA (mini 15pin D-SUB) · Component VGA share (D-SUB) · Composite (mini jack 3.5mm)				
	Analog	Audio Mini Jack 3.5mm				
	Audio	LAN, RS232C**				
	External Control	Integrated ATSC (8-VSB, Clear-QAM)/NTSC Coaxial Tuner				
	Tuner	USB Media Player (5V/500 mA)				
	USB Type-A port	Power Supply (5V/3A)				
	USB Type-C port	Audio Mini Jack 3.5mm				
	Audio	SPDIF / Audio Mini Jack 3.5mm (for headphones)				
	Output Terminals	Speaker Rating				
Audio	Integrated 5W x 2	Integrated 10W x 2				
POWER CONSUMPTION	On (Typ/Max Brightness/All Max)	31W/41W/80W	72W/84W/130W	109W/129W/180W	105W/125W/180W	144W/174W/220W
	Network Standby	2W				
	Standby	0.5W				
	Current Rating	0.9A - 0.4A @ 100V - 240V	1.5A - 0.6A @ 100V - 240V	2.1A - 0.8A @ 100V - 240V	2.1A - 0.8A @ 100V - 240V	2.5A - 1.0A @ 100V - 240V
PHYSICAL SPECIFICATIONS	Bezel Width (L/R, T/B)	12.5mm/12.5mm/12.5mm/13.9mm			13.0mm/13.0mm/13.0mm/14.4mm	
	Net Dimensions (Without Stand; W x H x D)	28.61 x 16.63 x 2.64 in. 726.6 x 422.4 x 67.1 mm*	38.3 x 22.04 x 2.80 in. 970.2 x 559.8 x 71.0 mm	43.42 x 24.98 x 2.82 in. 1102.8 x 634.4 x 71.6 mm	48.76 x 27.98 x 2.83 in. 1238.6 x 710.8 x 72.0 mm	57.38 x 32.83 x 2.87 in. 1457.5 x 883.9 x 73.0 mm
	Net Weight (Without Stand)	5.7kg / 12.5lbs.	10.2kg / 22.4lbs.	12.1kg / 26.7lbs.	16.8kg / 37.0lbs.	23.3kg / 51.3lbs.
	VESA Hole Configuration	100 x 100	200 x 400		400 x 600	
ENVIRONMENTAL CONDITIONS	Operating Temperature	0 - 40 °C / 32 - 104 °F				
	Operating Humidity	20-80% (without condensation)				
	Operating Altitude	0 - 3000m (0 - 9843ft)				
LIMITED WARRANTY	3 years Advanced Replacement***					
ADDITIONAL FEATURES	Energy Star 8.0, Naviset Administrator 2 Compatible, Wake on Video Signal, ON/OFF Schedule Function, Built-In Closed-Captioning (TTS), V-Chip Functionality, USB Media Player (UHD Support except for E328), Integrated Speakers, HDR Gamma, IP Addressable, External Control through RS232C					
SHIPS WITH	3.0m AC Power Cable, 3.0m HDMI Cable, IR Remote Control, Batteries					
OPTIONAL ACCESSORIES	Table Top Stand (ST-32E2), All OPS PC's when coupled with the OPS-DOCK			Table Top Stand (ST-55E), All OPS PC's when coupled with the OPS-DOCK		

* E238: 4K Signal is downscaled and displayed at FHD

** LAN and RS-232C communication is unilateral when the display is in standby. The only supported command in this mode is Power On. Once on, the display will send feedback information. Ping via IP address is available in standby

*** Warranty restrictions apply. Contact your representative for details.

- 1 LAN port (RJ-45)
- 2 RS-232C (9-pin D-SUB)
- 3 USB Type-C port (power supply 5 W/3 A)
- 4 Headphone terminal (stereo mini jack)
- 5 Digital audio output terminal
- 6 AV input terminal
- 7 HDMI1 (ARC), HDMI2, HDMI3 In
- 8 VGA In (15-pin D-SUB)
- 9 Audio input terminal (stereo mini jack)
- 10 USB Type-A port
- 11 ANT / Cable

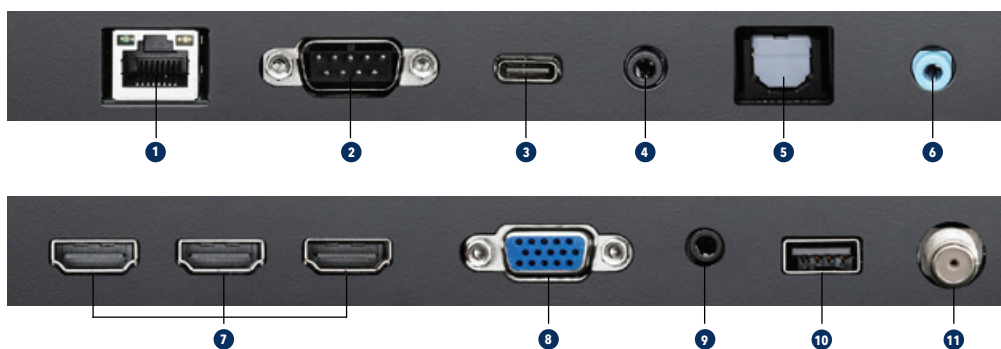

TileMatrix and TileComp are trademarks of Sharp NEC Display Solutions. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.



©2021 Sharp NEC Display Solutions of America, Inc. | All rights reserved.

Cat.No. 25.NEC.80.GL.UN. | rev. 03.16.2021

Sharp NEC Display Solutions of America
www.sharpeddisplays.us