

# WyreStorm Express™ 5 x 1 HDMI Switcher with Remote

EXP-SW-0501



## Key Features

- Connect up to five HDMI devices to a single input on your TV
- Switch between any five sources at the same time
- Full 1080p HD video and HD audio compliant
- Simple plug-and-play connection and push button operation

The WyreStorm Express™ EXP-SW-0501 enables quick and easy switching of up to five HDMI sources to a single HDMI output with control from both the front panel or included IR remote control.

Supporting High Definition audio and all video formats up to 1080p/24Hz with full 3D support, the EXP-SW-0501 switcher is the perfect solution for reliable, plug-and-play HD distribution.

## Additional Features & Benefits

- Simple plug-and-play connection - no set up / drivers / software required
- Allows up to 5 HDMI audio/video devices to be switched to one HDMI display device, such as digital signage panel, HDTV or digital projector
- Automatically negotiates EDID signals from display for seamless communication between devices
- Supports HD audio
- Supports high definition HDMI resolutions, including 1080p, 1080i, 720p at 24Hz and other standard video formats
- Each port supports both HDMI and DVI inputs
- Supports UXVGA resolutions up to 1920x1200
- Dual switching control via front panel and IR - infrared handset supplied for remote control switching
- Fully HDCP compliant
- HDMI V1.3b
- Full 3D support – frame packing/sequential – Blu-ray, stereoscopic – satellite/cable broadcasts)
- Signal transmission rate 6.75Gbps
- 1 year warranty

## In the Box


- 1x WyreStorm Express™ EXP-SW-0501 5x1 HDMI Switcher
- 1x EXP-SW-0501 remote control handset
- 1x 5V DC/1A universal power supply

## Specification

Audio and Video	
Audio Formats	Up to 7.1 DTS-HD Master Audio and Dolby TrueHD
Video Resolution	1920x1080@60Hz (1080p60)
Color Depth	24bit (1080p)
Maximum Pixel Clock	297 MHz
Communication and Control	
HDMI	HDCP   EDID DVI/D supported with adapter (not included)
Power	
Power Supply	Input: 100~240V AC 50/60Hz Output: 5V DC 1A
Max Power Consumption	4W

Environmental	
Operating Temperature	32°F ~ 95°F (0°C ~ 35°C) 5% ~ 90%, non-condensing
Maximum BTU	13.64
Dimensions and Weight	
Height	19mm/0.75in
Width	162mm/6.4in
Depth	69mm/2.7in
Weight	0.7kg/1.54lbs
Regulatory	
Safety and Emission	CE   FCC   RoHS

## Basic Wiring Diagram

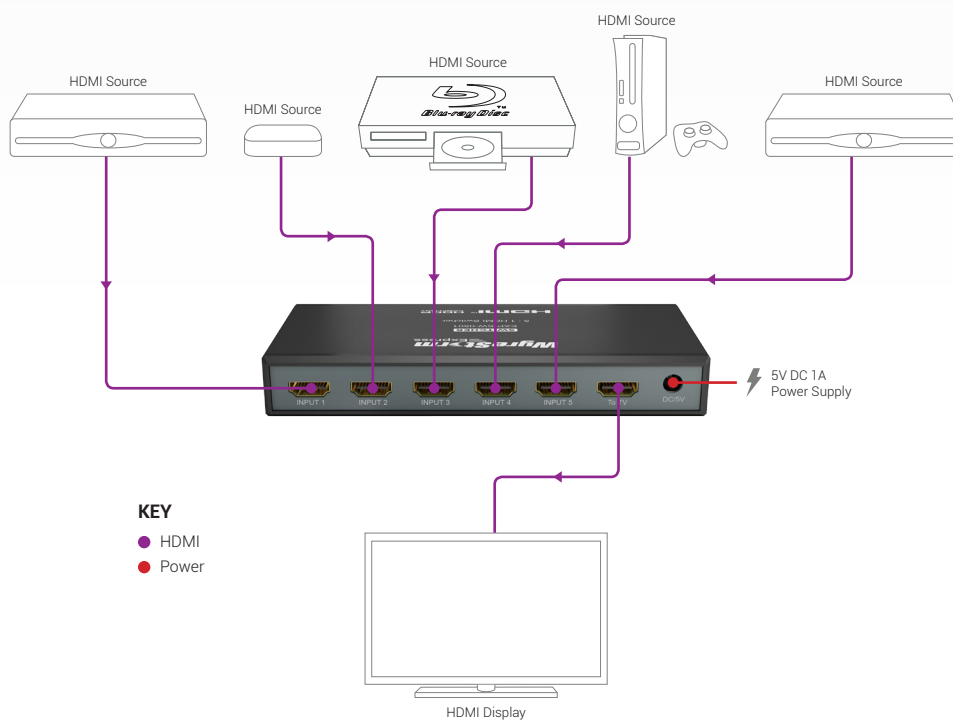

HDMI® HDCP