

HydraPort® 6 Module Connection Ports

HPX-600SL, Brushed Aluminum (FG560-01-SL) HPX-600BL, Black Anodized (FG560-01-BL)



Overview

With space for up to six modules, the HPX-600 allows you to elegantly connect mobile devices at your desk, lectern or table using the most beautiful connectivity system ever developed. This sleek solution supports pass-through connectors for audio, video, Ethernet, USB and power plus control. The modular assembly makes it easy to change connections as needs evolve, and makes HydraPort[°] future proof for connection types that have yet to be developed. The elegant, flush-mount design conveniently opens in both directions providing a clean, unobtrusive look.

Common Applications

The HPX-600 is perfect for conference rooms, classrooms or auditoriums where users need a simple, convenient way to connect devices power, Ethernet, USB, audio, and video.

Features

- Modular Design is Future Proof Features an assembly with the flexibility to change the modules to meet current and future needs
- Variety of Sizes for All Types of Applications The HPX-600 accommodates six module units. Use the HydraPort Connection Preview Application to determine the size needed, based on the connection modules desired
- Elegant and Unobtrusive Flush-mount design installs cleanly into a lectern or table and the lid conveniently opens in both directions providing a clean look
- No Electrician Required HydraPort power modules can be connected directly to a wall or floor outlet eliminating the need for an electrician
- Control The Room Add Metreau[®] or Novara[®] Keypad modules to control AV devices, lighting or shades as well as to initiate pre-programmed events
- Anodized Aluminum These stylish, low profile connectivity ports have the same contemporary brushed aluminum enclosure as the higher-end office furniture manufacturers at the same price as most competitive painted metal models

• Updated Web HydraPort Connection Preview Application – Now you can select from all four connection port bases and even switch from one to the other as you build your module set. Plus you can still 'Save, Load and/or Print' every configuration

Dealer Benefits

- Flexible Design The variety of chassis sizes and modules makes it easy to customize a connection port for every type of customer need using the HydraPort Connection Preview Application
- Simplify the Installation The HydraPort series is easy to install, and even easier to change connection types since the modules slide easily into the Chassis
- No Electrician Required HydraPort power modules can be connected directly to a wall or floor outlet eliminating the need for an electrician

Customer Benefits

- **Modular Design is Future Proof** Features an assembly that allows users to populate the Chassis with different connection types that meet their current and future needs
- **Convenient Connections** The HydraPort makes it easy for users to connect mobile devices such as laptops to in-room equipment and power plus Ethernet without having to run long cables
- Elegant and Unobtrusive Flush-mount design conveniently opens in both directions providing a clean look

Specifications

GENERAL	
Dimensions	 Max above mounting surface: 5/16" (7.3mm) with lid open, 1/8" (3mm) with lid closed Max below mounting surface: 6 15/16" (175 mm) Mounting surface footprint: 8 3/16" x 5 7/16" (208mm x 138mm) Min. mounting surface thickness: 3/4" (19 mm) Max mounting surface thickness: 2" (51 mm) Table Cutout Dimensions: 7.64" x 4.84" (194mm x 123mm)
Number of Modules Supported	Module sizes are provided in "HydraPort units" Modules range in size from 1/2 to 4 1/2 HydraPort units The HPX-600 supports up to 6 total single-space modules
Available Models	HPX-600SL, Brushed Aluminum (FG560-01-SL) HPX-600BL, Black Anodized (FG560-01-BL)
Enclosure	Black finish metal frame and lid with black plastic end caps
Certifications	UL 962A

HPX-600 COMPATIBLE HYDRAPORT CONNECTION MODULES	
HPX-AV101-HDMI (FG552-24)	OVERVIEW
Single HDMI Module with Integrated Cable	The HPX-AV101-HDMI module provides a HDMI
HDMI	connection to the HydraPort chassis.
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	HDMI connector
	REAR PANEL COMPONENTS
	6' 6 3/4" (2 m) Cable to HDMI connector
HPX-AV101-DVI (FG552-23)	OVERVIEW
Single DVI-D Module with Integrated Cable	The HPX-AV101-DVI module provides a DVI-D
	connection to the HydraPort chassis.
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	Female DVI-D connector
	REAR PANEL COMPONENTS
	6' 6 3/4" (2 m) Cable to male DVI-D connector
HPX-AV101-DVI-A (FG552-22)	OVERVIEW
DVI-D with Stereo Module with Integrated Cables	The HPX-AV101-DVI+A module provides DVI-D video
	plus stereo audio connectivity to the HydraPort chassis
	with integrated video and audio cables.
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	Female DVI-D connector
	Female 1/8" stereo mini-jack
	REAR PANEL COMPONENTS
	6' 6 3/4" (2 m) Cable to male DVI-D connector
	6' 6 3/4" (2 m) Cable to male 1/8" stereo mini-jack
	audio connector

HPX-AV100-CS+A (FG552-10)	OVERVIEW
Composite with Stereo Module	The HPX-AV100-CS+A module provides composite
VIDEO AUDIO	video plus stereo audio connectivity to the HydraPort
	chassis
LEFT RIGHT	DIMENSIONS
	1 HydraPort Unit
	i nyurar orc onc
	FRONT PANEL COMPONENTS
	3 female RCA connectors (1 for video, 2 for right/left
	audio)
	REAR PANEL COMPONENTS
	6-position Phoenix screw-terminal connector
HPX-AV101-RGB+A (FG552-25)	OVERVIEW
RGB with Stereo Module with Integrated Cables	The HPX-AV101-RGB+A module provides RGB video
VGA AUDIO	plus stereo audio connectivity to the HydraPort chassis
	with integrated video and audio cables.
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	Female HD-15 connector
	Female 1/8" stereo mini-jack connector
	REAR PANEL COMPONENTS
	6' 6 3/4" (2 m) Cable to male HD-15 connector
	6' 6 3/4" (2 m) Cable to male stereo mini-jack
	connector
HPX-AV102-RGB+A (FG552-25)	OVERVIEW
RGB with Stereo Module with Integrated Cables	The HPX-AV102-RGB+A module provides RGBHV video
VGA AUDIO	plus stereo audio connectivity to the HydraPort
	chassis.
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	Female HD-15 connector
	Female 1/8" stereo mini-jack connector
	REAR PANEL COMPONENTS
	6' 6 3/4" (2 m) Cable to male HD-15 connector
	6' 6 3/4" (2 m) Cable to male HD-15 connector
	connector
	CONNECTOR

HPX-C5400-CS+A (FG552-50-BL-K)	OVERVIEW
Composite with Stereo to Cat5 Module	The HPX-C5400-CS+A module provides composite
	video plus stereo audio connectivity to the HydraPort
	chassis and activates on button press.
ACTIVE	
\odot	DIMENSIONS
VIDEO	4.5 HydraPort Units
NEC	
	FRONT PANEL COMPONENTS
	3 female RCA connectors (1 for video, 2 for right/left
	audio)
	REAR PANEL COMPONENTS
	RJ-45 connector for UDM Cat5
HPX-C5400-VGA+A (FG552-51-BL-K)	OVERVIEW
RGBHV with Stereo to Cat5 Module	The HPX-C5400-VGA+A module provides RGBHV video
	plus stereo audio connectivity to the HydraPort chassis
	and activates on button press.
ACTIVE	DIMENCION
\odot	DIMENSIONS
VGAINPUT	4.5 HydraPort Units
	FRONT PANEL COMPONENTS
AUDIO	1 female HD-15 VGA connector
\odot	1 female 1/8" stereo mini-jack
Contraction and the second sec	
	REAR PANEL COMPONENTS
	RJ-45 connector for UDM Cat5
HPX-C5400-CN+A (FG552-52-BL-K)	OVERVIEW
Component with Stereo to Cat5 Module	The HPX-C5400-CN+A module provides component
	video plus stereo audio connectivity to the HydraPort
	chassis and activates on button press.
ACTIVE	
\odot	DIMENSIONS
	4.5 HydraPort Units
Рь 💿	FRONT PANEL COMPONENTS
💿 Pr 🔿	5 female RCA connectors (3 for component video, 2
	for right/left audio
	REAR PANEL COMPONENTS
	RJ-45 connector for UDM Cat5

HPX-N100-RJ45 (FG553-01)	OVERVIEW
Single Ethernet Module	The HPX-N100-RJ45 module provides a single RJ-45
Single Ethermodule	connection to the HydraPort chassis.
	DIMENSIONS
	1 HydraPort Unit
	2, 4
	FRONT PANEL COMPONENTS
	1 RJ-45 connector
	REAR PANEL COMPONENTS
	8-position punch-down block
HPX-N102-RJ45 (FG553-02)	OVERVIEW
Dual Ethernet Module	The HPX-N102-RJ45 module provides two RJ-45
	connections to the HydraPort chassis.
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	2 RJ-45 connectors
	REAR PANEL COMPONENTS
	2 8-position punch-down blocks
HPX-N100-USB (FG553-11)	OVERVIEW
Single USB Module with Integrated Cable	The HPX-N100-USB module provides a single USB
	connection to the HydraPort chassis
(******	,
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	Female USB Type A connector
	REAR PANEL COMPONENTS
	6' 6 3/4" (2 m) Cable to male USB Type A connector
HPX-CPT200-W (FG562-41)	OVERVIEW
Cable Pass-Thru Well Module	The HPX-CPT200-W provides a convenient way to
and the second	keep cables out of site in an HydraPort HPX-600, 900
	or 1200 chassis, while still being readily available to
	connect when needed.
	DIMENSIONS
	2 HydraPort Units

HPX-CPTS100-W (FG562-42)	OVERVIEW
Spacer, Cable Pass-Thru Well Module	The HPX-CPTS100-W provides a simple and convenient
	way to add additional spaces to the HPX-CPT200-W
	HydraPort [®] Cable Pass-Through Well Module, thereby
	increasing the number of cables that can be passed
	through a single HydraPort. Adding one HPX-CPTS100-
	W spacer adds two circular openings to the existing
	two openings to accommodate a total of 4 cables.
	Adding a second spacer adds another two circular
	openings, providing a maximum of 6 openings per
	HydraPort. Each HPT-CPTS100-W Pass-Through
	Module Spacer utilizes 1 HydraPort Unit.
	DIMENSIONS
	1 HydraPort Unit
HPX-CPTS300-W (FG562-42K)	OVERVIEW
Cable Pass-Thru Well Module and Spacer Kit	The HPX-CPTS300-W kit includes the Cable-Pass-Thru
	Well Module and Spacer together providing a simple
interest and an interest on the interest of the	and convenient way to add four circular openings to
	accommodate four cables - while keeping them out of
	sight in a HydraPort HPX-600, 900 or 1200 chassis.
	DIMENSIONS
	3 HydraPort Units
HPX-U100-BTN (FG554-01)	OVERVIEW
Single Button Module with LED	The HPX-U100-BTN module provides discrete button
	control to the HydraPort chassis.
	DIMENSIONS
	1 HydraPort Unit
	FRONT PANEL COMPONENTS
	Single push-button with LED back-light
	REAR PANEL COMPONENTS
	2-position Phoenix screw-terminal connector for LED
	2-position Phoenix screw-terminal connector for push
	button closure

HPX-U200-MOD (FG554-81)	OVERVIEW
Modero [®] Connection Module	The HPX-U200-MOD module provides a connection for
RGB POWER	a Modero Tabletop Touch Panel to the HydraPort
	chassis.
ETHERNET AUDIO/VIDEO	DIMENSIONS
	2 HydraPort Units
	,
	FRONT PANEL COMPONENTS
	3 RJ-45 connectors
	1 2-position Phoenix connector
	REAR PANEL COMPONENTS
	3 8-position punch-down blocks
	1 2-position Phoenix screw-terminal connector
HPX-U400-MET-6N (FG554-11-BL-K)	OVERVIEW
Metreau [®] 6-Button Keypad Kit with Carrier	The HPX-U400-MET-6N module is a Metreau 6-Button
	keypad in a carrier that allows it to be installed into
	the HydraPort chassis.
TUNER DVD	
LIGHTS FAN	FEATURES
BLINDS DISPLAY	 Includes navigation wheel for simplified control
	 Blue LEDs light up when buttons are pressed
	 Conveniently matches the styling of the NI-
	3101-SIG Controller
	DIMENSIONS
	4.5 HydraPort Units
	FRONT PANEL COMPONENTS
	Pushbuttons – 6 tactile pushbuttons with blue LED
	indicators that illuminate when pressed to confirm the
	source/function was selected and that it is currently
	being used. These pre-printed buttons are field-
	replaceable
	ID Concern Currents stored and ANAV ID (20 bills on by)
	IR Sensor – Supports standard AMX IR (38 kHz only) LED Levels Indicator - set of 7 blue LEDs provide level
	feedback
	iccubuck
	Navigation Wheel – consists of 5 pushbuttons: 4
	directional pushbuttons (up, down, right, left), 1
	center pushbutton, and bi-directional rotating wheel
	for channel adjustments
	REAR PANEL COMPONENTS
	DIP switch – 8 position mini DIP switch used to set the

	device address for the keypad on the AxLink Bus (1-
	255)
	AxLink connector - 4 pin 3.5mm Phoenix connector for
	AxLink connection to the NetLinx Master
HPX-U400-MET-7 (FG554-13-BL-K)	OVERVIEW
Metreau 7-Button Keypad Kit with Carrier	The HPX-U400-MET-7 module is a Metreau 7-Button
	keypad in a carrier that allows it to be installed into
	the HydraPort chassis.
	FEATURES
	° AxLink connectivity to NetLinx master
	Standard buttons include TUNER, DVD,
FAN	LIGHTS, FAN, BLINDS, DISPLAY, and +/-
BLINDS	° Blue LEDs glow to indicate button selection
DISPLAY	° Conveniently matches NI-3101-SIG
	Controller
	 Bottom button can act as a single button or
	as two buttons
	as two buttons
	DIMENSIONS
	4.5 HydraPort Units
	FRONT PANEL COMPONENTS
	7 tactile pushbuttons with blue LED indicators that
	illuminate when pressed to confirm the
	source/function was selected and that it is currently
	being used. These pre-printed buttons are field-
	replaceable. The bottom button functions as 2 buttons
	- there are 2 positions (left and right) that allow the
	user to control channel/levels (up/down).
	Blue LEDs indicate activity
	Diac LEDS malcate activity
	REAR PANEL COMPONENTS
	DIP switch - 8 position mini DIP switch used to set the
	device address for the keypad on the AxLink Bus
	AxLink connector - Wiring - 4-pin 3.5mm Phoenix
	AxLink connector

HPX-U400-MET-13 (FG554-12-BL-K)

Metreau 13-Button Keypad Kit with Carrier



OVERVIEW

The HPX-U400-MET-13 module is a Metreau 13-Button keypad in a carrier that allows it to be installed into the HydraPort chassis.

FEATURES

- ° AxLink connectivity to NetLinx master
- Standard buttons include 1-9, 0, ENTER, SAVE, and +/-
- [°] Blue LEDs glow to indicate button selection
- Conveniently matches the NI-3101-SIG
 Controller
- Bottom button can act as a single button or as two buttons

DIMENSIONS

4.5 HydraPort Units

FRONT PANEL COMPONENTS

13 tactile pushbuttons with blue LED indicators that illuminate when pressed to confirm the source/function was selected and that it is currently being used (12 single-width, 1 double-width). These pre-printed buttons are field-replaceable. The bottom button functions as 2 buttons - there are 2 positions (left and right) that allow the user to control channels (up/down).

Blue LEDs indicate activity

REAR PANEL COMPONENTS

DIP switch - 8 position mini DIP switch used to set the device address for the keypad on the AxLink Bus

AxLink connector - Wiring - 4-pin 3.5mm Phoenix AxLink connector

HPX-U400-R-MET-6N (FG564-11-BL) Metreau 6-Button Keypad Ramp Mount Kit



OVERVIEW

The HPX-U400-R-MET-6N module is a Metreau 6-Button Keypad in a carrier that allows it to be installed into the HydraPort chassis.

FEATURES

- Includes navigation wheel for simplified control
- ° Blue LEDs light up when buttons are pressed
- Conveniently matches the styling of the NI-3101-SIG Controller

DIMENSIONS

4 HydraPort Units

FRONT PANEL COMPONENTS

Pushbuttons – 6 tactile pushbuttons with blue LED indicators that illuminate when pressed to confirm the source/function was selected and that it is currently being used. These pre-printed buttons are fieldreplaceable

IR Sensor – Supports standard AMX IR (38 kHz only) LED Levels Indicator - set of 7 blue LEDs provide level feedback

Navigation Wheel – consists of 5 pushbuttons: 4 directional pushbuttons (up, down, right, left), 1 center pushbutton, and bi-directional rotating wheel for channel adjustments

REAR PANEL COMPONENTS

DIP switch – 8 position mini DIP switch used to set the device address for the keypad on the AxLink Bus (1-255)

AxLink connector - 4 pin 3.5mm Phoenix connector for AxLink connection to the NetLinx Master

HPX-U400-R-MET-7 (FG564-13-BL) Metreau 7-Button Keypad Ramp Mount Kit



OVERVIEW

The HPX-U400-R-MET-7 module is a Metreau 7-Button Keypad in a carrier that allows it to be installed into the HydraPort[®] chassis.

FEATURES

- AxLink connectivity to NetLinx master Standard buttons include TUNER, DVD, LIGHTS, FAN, BLINDS, DISPLAY, and +/-
- ° Blue LEDs glow to indicate button selection
- ° Conveniently matches NI-3101-SIG Controller
- Bottom button can act as a single button or as two buttons

DIMENSIONS

4 HydraPort Units

FRONT PANEL COMPONENTS

7 tactile pushbuttons with blue LED indicators that illuminate when pressed to confirm the source/function was selected and that it is currently being used. These pre-printed buttons are fieldreplaceable. The bottom button functions as 2 buttons - there are 2 positions (left and right) that allow the user to control channel/levels (up/down). Blue LEDs indicate activity

REAR PANEL COMPONENTS

DIP switch - 8 position mini DIP switch used to set the device address for the keypad on the AxLink Bus AxLink connector - Wiring - 4-pin 3.5mm Phoenix AxLink connector

HPX-U400-R-MET-13 (FG564-12-BL)

Metreau 13-Button Keypad Ramp Mount Kit



OVERVIEW

The HPX-U400-MET-13 module is a Metreau 13-Button keypad in a carrier that allows it to be installed into the HydraPort chassis.

FEATURES

- ° AxLink connectivity to NetLinx master
- Standard buttons include 1-9, 0, ENTER, SAVE, and +/-
- ° Blue LEDs glow to indicate button selection
- Conveniently matches the NI-3101-SIG
 Controller
- Bottom button can act as a single button or as two buttons

DIMENSIONS

4 HydraPort Units

FRONT PANEL COMPONENTS

13 tactile pushbuttons with blue LED indicators that illuminate when pressed to confirm the source/function was selected and that it is currently being used (12 single-width, 1 double-width). These pre-printed buttons are field-replaceable. The bottom button functions as 2 buttons - there are 2 positions (left and right) that allow the user to control channels (up/down).

Blue LEDs indicate activity

REAR PANEL COMPONENTS

DIP switch - 8 position mini DIP switch used to set the device address for the keypad on the AxLink Bus


AxLink connector - Wiring - 4-pin 3.5mm Phoenix AxLink connector


HPX-U400-CP-1008 (FG554-71-BL)	OVERVIEW
Novara 8-Button ControlPad (US) Module	The HPX-U400-CP-1008 module is a Novara 8-Button
	(US) ControlPad designed to install directly into the
	HydraPort chassis.
Main Off On	FEATURES
	° 8-button panel layout
Volume Up	° Blue, backlit buttons with programmable
DVD Volume Down	feedback
	 Includes acetate sheet with 50 pre-cut
Picture Audio Blank Mute	button label inserts for easy, cost effective
	labeling
	_
	° 1315 events per panel
	DIMENSIONS
	DIMENSIONS
	4 HydraPort Units
	BUTTON LAYOUT
	8 buttons
	Blue, backlit buttons with programmable feedback
	MAX NUMBER OF EVENTS PER CONTROLPAD
	1315
	REAR PANEL COMPONENTS
	2 relay ports for relay control
	1 RS-232 port
	1 IR port
	1 input detection port
	1 USB device configuration port
	SUPPORTED BAUD RATES
	1200 - 115200

HPX-U400-SP-08-AX (FG554-51-BL)	OVERVIEW
Novara 8-Button Keypad with AxLink (US) Module	The HPX-U400-SP-08-AX module is a Novara 8-Button
	(US) AxLink KeyPad designed to install directly into the
	HydraPort chassis.
Main Off PC On	FEATURES
	° 8-button panel layout
Laptop Volume Up	° 4-pin AxLink connector and Status LED
Volume Down	° Blue, backlit buttons with controllable
	feedback
Picture Audio Blank Mute	 Includes acetate sheet with 50 pre-cut
	button label inserts for easy, cost effective
	labeling
	° One bi-directional RS-232 port, with
	accompanying loop through
	DIMENSIONS
	4 HydraPort Units
	POWER REQUIREMENTS
	Minimum: 80mA / Maximum: 130mA @ 12 VDC
	BUTTON LAYOUT
	8 buttons; blue, backlit buttons with controllable
	feedback
	REAR PANEL COMPONENTS
	4-pin AxLink connector/Status LED; RS-232 port, with
	accompanying loop-through port; power connector
	RS-232 PROTOCOL
	Baud rate: 9600
	data Bits: 8
	Stop Bits: 1
	Parity: No Parity
HPX-P200-PC-US (FG561-01)	OVERVIEW
Power Outlet (US) Module with Cord	The HPX-P200-PC-US module provides power
	connectivity for US plug types to the HydraPort
	chassis.
	DIMENSIONS
	2 HydraPort Units
	CERTIFICATIONS
	UL 962A
	REAR PANEL COMPONENTS

HPX-P250-PC-UK (FG561-11)	OVERVIEW
Power Outlet (UK) Module	The HPX-P250-PC-UK module provides power
	connectivity for UK plug types to the HydraPort
\land	chassis.
	DIMENSIONS
	2.5 HydraPort Units
	REAR PANEL COMPONENTS
	IEC 60320 C13 power cord connector
HPX-P200-PC-EU (FG561-21)	OVERVIEW
Power Outlet (EU) Module	The HPX-P200-PC-EU module provides power
	connectivity for EU plug types to the HydraPort
	chassis.
	DIMENSIONS
	2 HydraPort Units
	REAR PANEL COMPONENTS
	IEC 60320 C13 power cord connector
HPX-P200-PC-AU (FG561-31)	OVERVIEW
Power Outlet (AU) Module	The HPX-P200-PC-AU module provides power
	connectivity for AU plug types to the HydraPort
	chassis.
	DIMENSIONS
	2 HydraPort Units
	REAR PANEL COMPONENTS
	IEC 60320 C13 power cord connector
HPX-P250-PC-IN (FG561-41)	OVERVIEW
Power Outlet (IN) Module	The HPX-P250-PC-IN module provides power
	connectivity for UK plug types to the HydraPort
	chassis.
	DIMENSIONS
	2.5 HydraPort Units
	2.5 Hydrar oft offics
	REAR PANEL COMPONENTS
	IEC 60320 C13 power cord connector
HPX-B050 (FG558-01)	OVERVIEW
1/2 M Blank Panel	Blanks are available for unused slots in the HydraPort
	chassis.
	DIMENSIONS
	1/2 HydraPort Unit

HPX-B100 (FG558-02)	OVERVIEW
1 M Blank Panel	Blanks are available for unused slots in the HydraPort
	chassis.
	DIMENSIONS
-	1 HydraPort Unit
HPX-B200 (FG558-03)	OVERVIEW
2 M Blank Panel	Blanks are available for unused slots in the HydraPort
	chassis.
	DIMENSIONS
	2 HydraPort Units
HPX-B050-L (FG558-11)	OVERVIEW
1/2 M Custom Label Panel	The HPX-B050-L is a blank panel that is pad printed
	with custom text, and is available for labeling slots in
PC 1	the HydraPort chassis.
	DIMENSIONS
	1/2 HydraPort Unit
HPX-B100-L (FG558-12)	OVERVIEW
1 M Custom Label Panel	The HPX-B100-L is a blank panel that is pad printed
	with custom text, and is available for labeling slots in
PC 1	the HydraPort chassis.
	DIMENSIONS
	1 HydraPort Unit

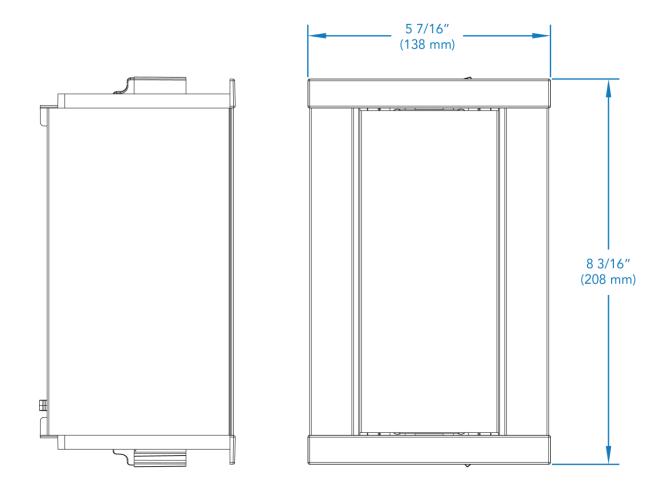

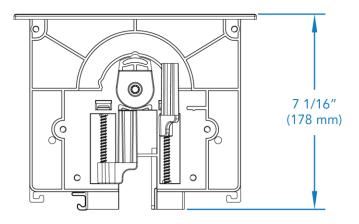

About AMX

AMX hardware and software solutions simplify the implementation, maintenance, and use of technology to create effective environments. With the increasing number of technologies and operating platforms at work and home, AMX solves the complexity of managing this technology with reliable, consistent and scalable systems. Our award-winning products span control and automation, system-wide switching and audio/video signal distribution, digital signage and technology management. They are implemented worldwide in conference rooms, homes, classrooms, network operation / command centers, hotels, entertainment venues, broadcast facilities, and more. ©2012 AMX. All rights reserved. Specifications subject to change. Revised 7-Jan-13.

AMX.com | 800.222.0193 | 469.624.8000 | +1.469.624.7400 | fax 469.624.7153