
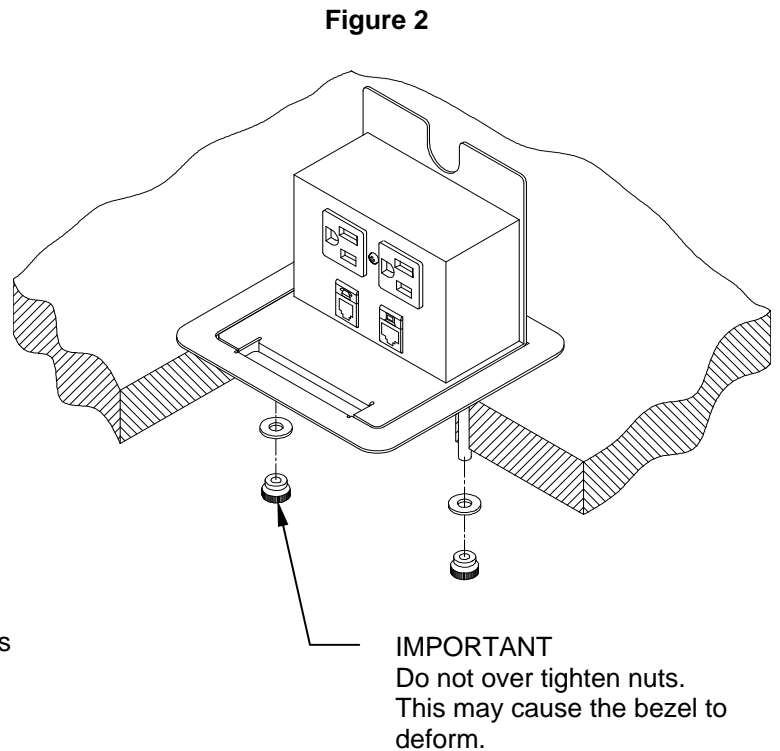


Interact JR. Installation Sheet

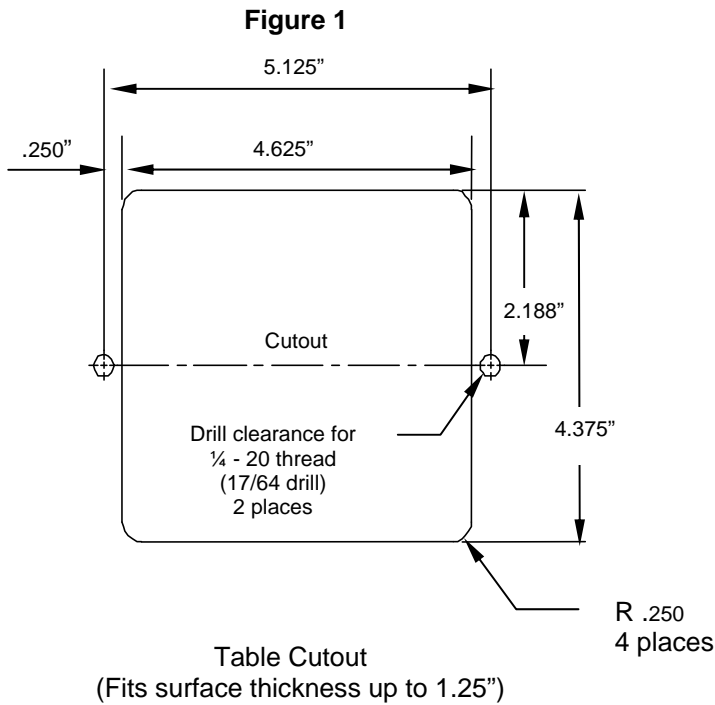

Installation Instructions

1. Follow the cutout illustration, Figure 1, for cutout size and bolt hole locations.
2. Insert Interact Jr. into cutout and secure with washers and plastic nuts provided, as shown in Figure 2.


Note to Telephone/Network Installer

Some jacks permit installation from the front of the housing. For this, feed the cables up through the shutter bushing on the underside of the Interact Jr. and out the clearance holes.

If you require access to the inside of the housing, remove the two screws on the underside of the Interact Jr. This will allow you to lift the housing up and away from the retaining bracket. This will provide access to the inside of the housing. Use caution not to scratch the painted surfaces.

Innovative Power + Data Solutions

ECA • 10 Mountain View Drive • Shelton, CT 06484 • Phone: 1-800-521-3175 • Fax: 203-924-6687
www.electri-cable.com

Recycled Content Information 	
Post-Consumer Content	16.40%
Pre-Consumer Content	4.10%
Total % qualifying toward LEED®	18.50%

Innovative Power + Data Solutions

ECA • 10 Mountain View Drive • Shelton, CT 06484 • Phone: 1-800-521-3175 • Fax: 203-924-6687
www.electri-cable.com