

MSA-AMK-07/10

The MSA-AMK-07 and MSA-AMK-10 Any Mount Kits are designed to mount 7" or 10" Modero S Series Wall Mount Touch Panels into standard single or double gang boxes in the US, UK, EU and Australia, making the installation of a Modero S Series control interface simple and effective. The MSA-AMK-07 (FG2265-25) is compatible with the MSD-701 (FG2265-02), while the MSA-AMK-10 (FG2265-26) (FIG. 1) is compatible with MSD-1001 (FG2265-01).



FIG. 1 MSA-AMK-10 ANY MOUNT KIT BACK BOX (REAR)

PRODUCT SPECIFICATIONS	
Models Available:	<ul style="list-style-type: none"> MSA-AMK-07 (FG2265-25) MSA-AMK-10 (FG2265-26)
Dimensions (HWD):	<ul style="list-style-type: none"> MSA-AMK-07: 4.88" x 7.38" x 0.98" (12.4 cm x 18.8 cm x 2.5 cm) MSA-AMK-10: 6.53" x 9.76" x 0.98" (16.6 cm x 24.8 cm x 2.5 cm)
Weight:	<ul style="list-style-type: none"> MSA-AMK-07: 0.10 lbs (45.36 g) MSA-AMK-10: 0.25 lbs (113.40 g)
Certifications:	TBD
Included Accessories:	<p>MSA-AMK-07:</p> <ul style="list-style-type: none"> Back Box (60-2265-33) Gasket, Foam (66-2265-29) Screw, M3.5 X 30mm, PFH, Clear Zinc (4) (80-1620-04) Screw, #6-32 X 1.25, PFH, Type F, Clear Zinc (4) (80-1700-09) <p>MSA-AMK-10:</p> <ul style="list-style-type: none"> Back Box (60-2265-34) Gasket, Foam (66-2265-30) Screw, M3.5 X 30mm, PFH, Clear Zinc (4) (80-1620-04) Screw, #6-32 X 1.25, PFH, Type F, Clear Zinc (4) (80-1700-09)
Other AMX Equipment:	<ul style="list-style-type: none"> MSD-701 7" Modero S Series Wall Mount Touch Panel (FG2265-02) MSD-1001 10" Modero S Series Wall Mount Touch Panel (FG2265-26)

Installation of the Any Mount Kit

The Any Mount Kits are designed to utilize existing or newly installed gang boxes, with a new back box to replace the back box included with the touch panel. To install an Any Mount Kit and its accompanying touch panel:

- Before starting the installation, ensure that Ethernet cable has been pulled to the gang box, and that all appropriate Power Over Ethernet (PoE) injectors have been connected to the cable going to the gang box.
- If the gang box already has an existing fixture or device installed in it, remove the fixture or device to expose the gang box (FIG. 2).

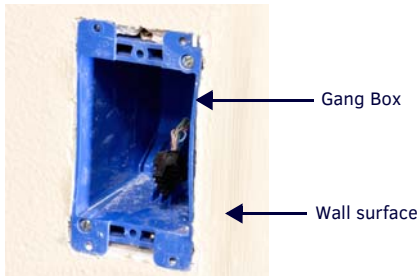


FIG. 2 EXISTING GANG BOX

- Pull the Ethernet cable into the gang box, making sure that the male RJ-45 connector is accessible within the gang box.

- Match the screw connector holes on the gang box with the holes in the back box (FIG. 3). The Any Mount Kit back box has multiple holes to allow for single or double gang box design, and for standard gang box designs from the US, UK, EU and Australia. At the same time, examine how the back box rests on the gang box, looking for gaps between the back box and the wall surface.

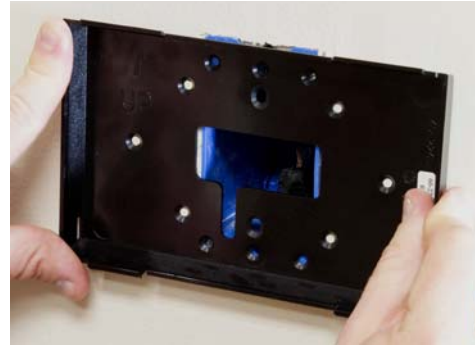


FIG. 3 TESTING THE ALIGNMENT OF THE BACK BOX SCREW HOLES.

- If the gap between the wall and the back box is extreme, or if the installation of the back box exposes too much of the gang box, you may apply the optional foam gasket (MSA-AMK-07: 66-2265-29; MSA-AMK-10: 66-2265-30) to the back of the back box. Peel the adhesive backing off the gasket and carefully apply it to the back box surface (FIG. 4).



FIG. 4 APPLYING THE OPTIONAL FOAM GASKET TO THE BACK BOX.

- Once you have confirmed the proper mounting position of the back box, attach the back box to the gang box, using either the screws used with the original fixture or device or with the included screws in the Any Mount Kit (FIG. 5).

WARNING: Be careful not to over-tighten the screws, which can bow or damage the back box.



FIG. 5 INSTALLING THE BACK BOX TO THE GANG BOX.

- After installing the back box, inspect the back box's placement. If necessary, the back box can be removed and the foam gasket installed.

- Pull enough slack on the Ethernet cable through the back box to allow the cable to reach the touch panel's RJ45 connector (FIG. 6).

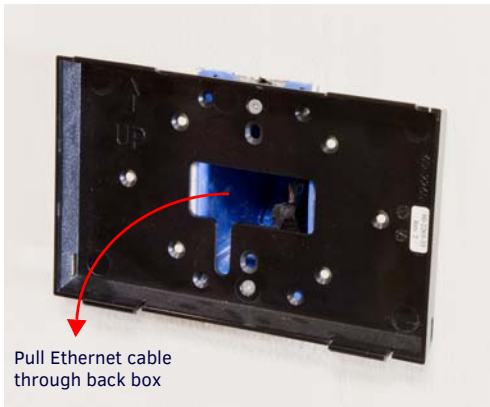


FIG. 6 ACCESSING THE ETHERNET CABLE THROUGH THE BACK BOX.

- Remove the touch panel's back box to access the back of the panel.
- Insert each connector into its corresponding location along the back of the touch panel. For more information on connection, please refer to the Operation Reference Guide for the Modero S Series panel being installed, available from www.amx.com.
- Test the incoming wiring by attaching the panel connections to their terminal locations and applying power. Verify that the panel is receiving power and functioning properly to prevent repetition of the installation.
- Latch the panel onto the top hooks on the back box and rotate it down (FIG. 7).



FIG. 7 HOOKING THE TOP OF THE TOUCH PANEL ON THE BACK BOX.

- Press gently but firmly and evenly on the surface of the touch panel until the top panel snap "clicks" to lock it down (FIG. 8).



FIG. 8 LOCKING DOWN THE BOTTOM OF THE TOUCH PANEL ONTO THE BACK BOX.

WARNING: if you see a gap between the panel and the back box, or feel any binding while locking down the panel, stop immediately and verify that no cables or other items are in the way. Do not force the panel into position, as this can cause damage to the touch screen or the panel electronics.

Removing the Touch Panel

In order to access the back of the touch panel, such as to install a USB connection for firmware upgrades, the device may need to be removed from the back box. To remove the touch panel:

- From the bottom, pull gently outward from the back box. Gently rock the panel back and forth to free the bottom from the back box.
- Rotate it up to release the top latch hooks, and carefully pull the device free from the back box. Take care not to damage or pull the connections on the back of the device, or to pull the back box from the gang box.

