


Folding Instructions

First fold out (back)
Text on outside

1

Follow these simple steps:

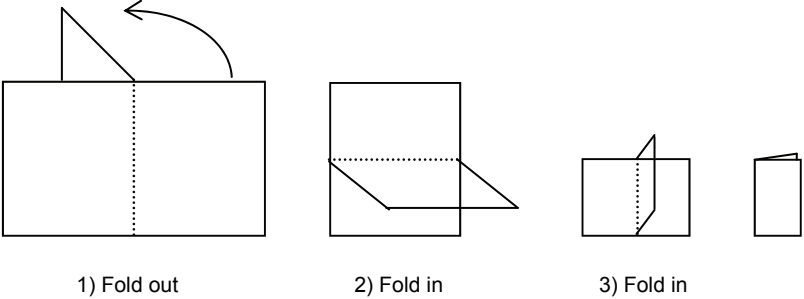

Second fold in (over)
Folding instructions on inside

2

Last fold in (over)
Features and benefits on inside

3

Automatic switching or manual override capability.	Support for VGA through QXGA signal format plus HDTV/Component compatible video channels.	Functions as a 1 x 2 DA (distribution amp) or local monitor output. Unit provides a second input and an input select to easily facilitate patching a second laptop PC into the presentation system.	Diagram label for easy installation.	Plug and Play compatible.
Automatically switches upon signal detection, but may also be controlled manually if desired. Override switching is accomplished via the Input Select / RS-232 input. RS-232 control is accomplished by sending ASCII commands to select either Input 1 or Input 2.	Accommodates a wide range of video signals—ensuring one's presentation or image will appear exactly as expected on the large screen video display.	Offers flexibility to alternate between two computer sources and simultaneously output to two displays or a single display plus local monitor.	Ensures intuitive operation.	
Facilitates the discovery of hardware in a system without the need for physical device configuration or user intervention.				

MX2106AV 2-In / 2-Out
VGA Auto + Audio Switcher

Feature

Benefit

Advantages:

- As a dedicated switcher and DA (distribution amp), the MX2106AV is designed to switch computer video signals and stereo audio.
- Each of the two inputs on the MX2106AV incorporates a 15-pin HD female video connector that is accompanied by a 3.5 mm audio jack.
- The two outputs each provide a 15-pin HD female video connector and a 3.5 mm audio jack.
- The MX2106AV has a rugged solid metal enclosure housed in a compact form factor that can easily be kept out of sight.
- The MX2106AV ships with an external, 9V 1.1A power adapter.
- Also ships as part of the MX2106AV Pack, which includes the MX2106AV and the RC5208CC Contact Switch Box for manual switch override of the system.

Pocket Pitch

Altinex

MX2106AV 2-In 2-Out
VGA Auto +Audio Switcher



Description: A 2-In / 2-Out switcher ideal for presentation spaces; with the ability to alternate between two computers and simultaneously output to two displays or a single display plus local monitor.

Target Customer: A/V Integrators & Technology Managers.

Target Installations: Classrooms, presentation spaces, and similar venues.

