


# 4K HDR 4:4:4 60Hz HDBaseT™ Matrix Switchers with Toslink Zone Audio De-Embed Outputs

## MXV Full Product Range

# WyreStorm

## Specification Sheet

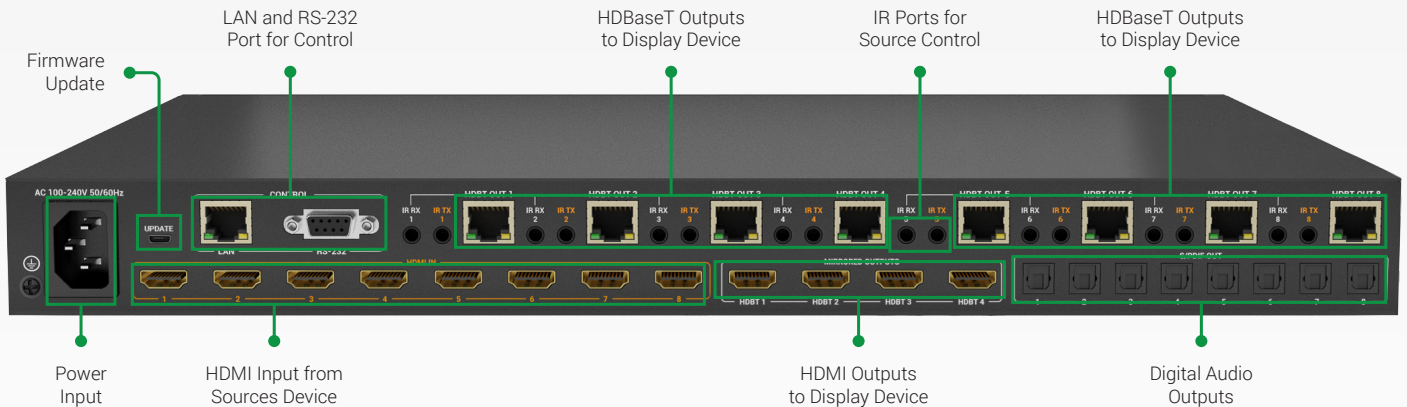

WyreStorm - Powerful. Reliable. Simple.

## Introduction

The latest in market leading matrix solutions, WyreStorm's MXV range brings the familiar power of the H2-series to a compact 1U chassis. Offering transmission of HDMI content up to 4K/60 4:4:4 & HDR to 35m/115ft (70m/328ft with MXV-70 models), pairing powerful HDBaseT & WyreStorm's variable light compression technology's, the MXV range utilizes HDBaseT zone outputs with PoH. Do even more with your audio, with the MXV range offering audio breakout from either source or output via Toslink optical, CEC triggering for all connected screens and A/V mute function enhances the offering for the modern home or commercial installation. The 6x6 and 8x8 models feature HDMI mirrored outputs that can be paired with WyreStorm's HAOC hybrid optical HDMI cables or any extender for transmission of HDBaseT or OM3 fibre.

## Key Features

- 4K HDR HDBaseT™ Matrix Switch, supporting:
  - Content up to 4K/60 4:4:4 & RGB 8-bit
  - The latest HDR standards, including 60Hz HDR-10 & HLG and Dolby Vision at 30Hz
  - HDCP 2.2 encryption technology ensuring compatibility with the latest 4K UHD content and sources
  - HD Multichannel audio up to DTS:X and Dolby Atmos to all outputs
- Proprietary compression algorithm enables 60Hz 4K UHD content (4:4:4 or HDR) to be sent over HDBaseT up to 70m/328ft
- 4 HDMI outputs mirroring HDBaseT Outputs 1-4 for connecting additional slave screens, projectors or AVR's
- HDMI Inputs and HDMI outputs support bandwidths of up to 18Gbps
- Compatible with DVI-I and DP++ v1.3 signals from compatible devices
- Assignable audio outputs allow audio to be independently de-embedded from sources or outputs via Toslink optical.
- Automatic (signal sensing) or manual (API operated) CEC power triggering of all connected screens or projectors (CEC compatibility required)
- A/V Mute function gives complete distribution control to a user allowing the signal to any zone to be independently switched off
- SmartEDID feature also dynamically detects display/source capabilities and automatically outputs the highest possible resolution
- Additional EDID management through DIP switches for global setting or via WebUI for independent management of EDID per source
- Assign a different EDID to each connected source device
- Embedded WyreStorm WebUI enables simple source switching and installer set-up & configuration
- WebUI includes full EDID management to read, copy, store or import EDID from connected devices
- API triggered standby mode places the unit into a low power state allowing for lower power consumption during downtime
- Flexible control options – front panel buttons, infrared remote control, local IR, RS-232, Telnet or WebUI
- 3.5mm jack input for receiving local IR commands out of line-of-sight
- Simple switching matrix remote control included, which can also be learned into a universal remote handset to allow the control of multiple devices from one handset
- 2-way IR for far-end device control from control system or source control from a zone.
- Option for end-user WebUI switching interface
- Compact 1U chassis with adjustable depth rack mounting brackets included
- US, UK, EU & AU Power cables included
- Can be combined with WyreStorm EXP-CON-DAC-D digital audio converter to downmix Dolby Digital 5.1 content to mix stereo and surround sound zones
- Capable of transmitting content to 50m/164ft using WyreStorm HAOC range of hybrid optical HDMI cables

## In the Box

1x MXV Matrix Switcher  
1x AC Power Cord with US/UK/EU/AU pins  
1x IR Remote (CR2025 Battery not Included)  
4/6/8x IR Emitters  
4/6/8x IR Receivers  
2x Matrix Mounting Brackets with screws  
1x Quickstart Guide

## Additional In the Box (KIT)

2x Standard HDBaseT Receivers  
2x Scaling HDBaseT Receivers  
1x IR Receiver for Matrix IR Ext.  
8x Receiver Mounting Brackets with screws (2 per RX)

# Specifications

	MXV-0404-H2A-KIT	MXV-0408-H2A	MXV-0606-H2A/70	MXV-0808-H2A/70
<b>Audio and Video</b>				
<b>Inputs</b>	4x HDMI In: 19-pin type A	4x HDMI In: 19-pin type A	6x HDMI In: 19-pin type A	8x HDMI In: 19-pin type A
<b>Outputs</b>	4x Audio Out: RCA Female Stereo (L/R) 4x S/PDIF Out: RCA Female 4x HDBT Out: 8-pin RJ-45	6x HDBT Out: 8-pin RJ-45 8x S/PDIF Out: TOSLINK 2x HDMI Out: 19-pin type A	6x HDBT Out: 8-pin RJ-45 6x S/PDIF Out: TOSLINK 4x HDMI Out: 19-pin type A	8x HDBT Out: 8-pin RJ-45 8x S/PDIF Out: TOSLINK 4x HDMI Out: 19-pin type A
<b>Output Video Encoding</b>	HDBaseT			
<b>Encoding Data Rate</b>	9.2Gbps			
<b>End to End Latency (Max)</b>	10µs (micro seconds)			
<b>Audio Formats</b>	Analog: 2ch Analog S/PDIF: 2ch LPCM   Dolby Digital and DTS up to 5.1ch HDMI: 2ch LPCM   Multichannel up to Dolby Atmos and DTS-X			
<b>Video Resolutions (Max)</b>	<b>Video Resolution</b>	<b>HDMI</b>	<b>MXV Cat6</b>	<b>MXV-70 Cat6</b>
	1920x1080p @120Hz 12bit	7m/23ft	35m/115ft	70m/230ft
	3840x2160p @60Hz 8bit 4:4:4	7m/23ft	35m/115ft	70m/230ft
	3840x2160p @60Hz 10bit 4:2:0 HDR	3m/10ft	35m/115ft	70m/230ft
	4096x2160p @60Hz 8bit 4:4:4	7m/23ft	35m/115ft	70m/230ft
	<b>Note:</b> WyreStorm recommends the use of shielded category cable to minimize signal noise and interference. Cat6a/7 cabling can support an additional 5m transmission distance of 4K content.			
<b>Supported Standards</b>	DCI   RGB   HDR   HDR10   Dolby Vision up to 30Hz   HLG   BT.2020   BT.2100			
<b>Maximum Pixel Clock</b>	HDMI: 600MHz   HDBaseT: 297MHz			
<b>Communication and Control</b>				
<b>HDMI</b>	HDMI 2.0   HDCP 2.2   EDID Input supports DVI/D and DisplayPort Dual-Mode (DP++) v1.3 with adapter (not included)			
<b>HDBaseT</b>	HDMI 2.0   HDCP 2.2   EDID   CEC   1-way PoH   Bidirectional IR			
<b>CEC</b>	CEC power triggering via API   Requires CEC compatibility			
<b>IR</b>	1x IR Ext: 3.5mm (1/8in) TRS Stereo 4x IR RX: 3.5mm (1/8in) TRS Stereo 4x IR TX: 3.5mm (1/8in) TS Mono Bidirectional over HDBaseT	6x IR RX: 3.5mm (1/8in) TRS Stereo 4x IR TX: 3.5mm (1/8in) TS Mono Bidirectional over HDBaseT	6x IR RX: 3.5mm (1/8in) TRS Stereo 6x IR TX: 3.5mm (1/8in) TS Mono	8x IR RX: 3.5mm (1/8in) TRS Stereo 8x IR TX: 3.5mm (1/8in) TS Mono
<b>RS-232</b>	1x RS-232: 9-pin DB9 Female   Matrix Control   Telnet commands supported			
<b>Ethernet</b>	1x LAN: 8-pin RJ-45 Female   Web UI   Matrix Control			
<b>Power</b>				
<b>Power Supply</b>	100~240V AC 50/60Hz			
<b>Max Power Consumption</b>	85W	124W	137W	169W
<b>Environmental</b>				
<b>Operating Temperature</b>	0 to +45°C (32 to +113 °F), 10% to 90%, non-condensing			
<b>Storage Temperature</b>	-20 to +70°C (-4 to +158 °F), 10% to 90%, non-condensing			
<b>Maximum BTU</b>	290 BTU/hr	424 BTU/hr	467.5 BTU/hr	577 BTU/hr
<b>Dimensions and Weight (Max)</b>				
<b>Rack Units/Wall Box</b>	1U			
<b>Height</b>	43.5mm/1.72in			
<b>Width</b>	440mm/17.33in			
<b>Depth</b>	300mm/11.82in			
<b>Weight</b>	5.34kg/11.75lbs			
<b>Regulatory</b>				
<b>Safety and Emission</b>	CE   FCC   RoHS   EAC   RCM			

**Note:** WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.