


PNP517

Pop-N-Plug® - Tower for Custom Tabletop Surface

Order No. PNP517

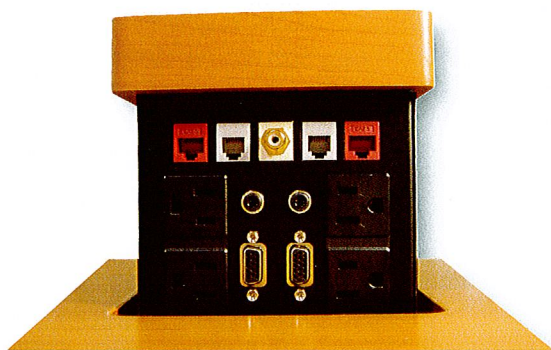

- Uses tabletop cutout for top
- Dual-sided connectivity
- Gas-Spring technology provides smooth open and close
- Support round, rectangle, or square cutouts
- Craftsman-milled edges create ultra-flat surface when closed
- Ships with 6ft pre-terminated cables for quick installations
- Customizable connectors

SPECIFICATIONS

PNP515

Factory configured to customer specifications. Order PNP515, plates, and connectors separately.

PNP517

General

AC Power: NEMA 5-15 (8)
Computer Video: 15-PIN HD F-M (4)
Stereo Audio: 3.5 mm F-M (4)
Network: CAT6 (RJ-45) F-M (4)
Telecom: RJ-11 F-M (4)
Composite Video: Yellow RCA F-F (2)
Accessories Included: Mounting screws, cable clamps
Top Not Included

Mechanical

AC Power Cord: 10 ft (3 m)
Audio, Video, and Communication: 6 ft (2 m)
Minimum Table Thickness: 0.75 in (19 mm)
Maximum Table Thickness: 1.125 in (29 mm)
Diameter: 4.950 in (126 mm)
Width: 5.65 in (144 mm)
Depth: 5.45 in (138 mm)

Height, opened: 5.10 in (130 mm)

Height (Below Tabletop): 8.75 in (222 mm)
Width (Below Tabletop): 8.50 in (216 mm)
Depth (Below Tabletop): 6.125 in (156 mm)
Maximum Weight For Top Cover: 1.38lbs (623g)
T° Operating: 10°C-35°C
T° Maximum: 40°C
Humidity: 90% non-condensing

Top Cover Dimensions (Max. Size)

Front Width: 5.65in (143.51mm)
Side Width: 5.45in (138.43mm)
Corner Radius: 0.30in (7.62mm)


Electrical

Power Rating (pass through AC power): 120VAC, 60Hz, 5A

Warranty

3 year warranty
1 year warranty on gas-spring

PRODUCT DIMENSIONS

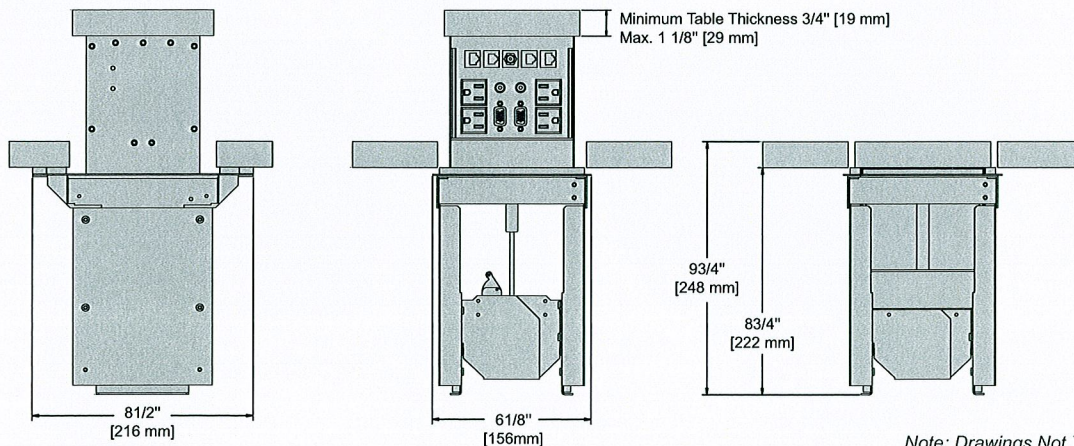


Note: Drawings Not To Scale.

OPTIONS FOR PNP517C

Order No. PNP517C

Section No. 1 (Connectors)

CM11308: 4-PIN Mini-DIN, F-F
 CM11309: 6-PIN Mini-DIN, F-F
 CM11310: 8-PIN Mini-DIN, F-F
 CM11315: Black Shielded 10-PIN RJ45
 CM11302: Black RCA, F-F
 CM11303: Red RCA, F-F
 CM11304: Yellow RCA, F-F
 CM11365: H-Position Control and Signal Present LED
 CM11311: BNC (Composite Video), F-F
 CM11312: Momentary Contact Closure to bare leads
 CM11313: Latching Contact Closure to bare leads
 CM11314: Green LED Indicator to bare leads
 CM11316: 3.5 mm Stereo Audio, F-M
 CM11341: HDMI F-M
 CM11306: Grey RJ-11, F-M
 CM11318: White RJ-11 6-PIN, F-M
 CM11319: Black RJ-11 6-PIN, F-M
 CM11351: Red CAT-6, RJ45, F-M
 CM11352: Black CAT-6, RJ45, F-M
 CM11353: Yellow CAT-6, RJ45, F-M
 CM11358: White CAT-6, RJ45, F-M
 CM11359: Orange CAT-6, RJ45, F-M
 CM11354: Green CAT-6, RJ45, F-M
 CM11355: Blue CAT-6, RJ45, F-M
 CM11364: Black 3-PIN Mini XLR M-F
 CM11408: White 4-PIN Mini XLR M-F
 CM11366: USB-B F - USB-A M
 CM11369: USB A F-M
 CM11301: Blank Connector

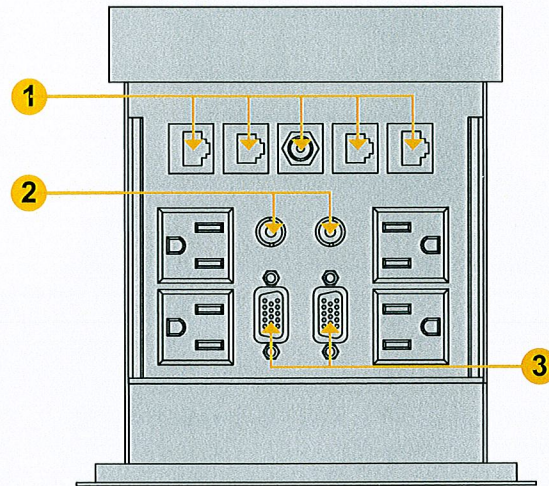

Section No. 2 (Audio)


CM11404: 3.5mm Stereo Audio, F-M
 CM11405: Blank Cover for 3.5mm Audio

Section No. 3 (Computer)

CM11402: 15-PIN HD, F-F
 CM11403: 9-PIN D, F-F
 CM11406: 15-PIN HD, F-M
 CM11410: 9-PIN D, F-M
 CM11401: Blank D-Sub Cover, Black

Picture Above Show PNP517C

TABLE CUTOUT DIMENSIONS

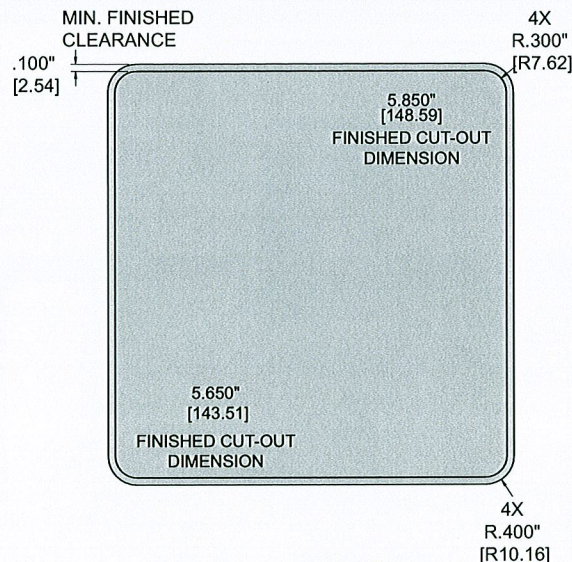

Note: Drawings Not To Scale.