


PS-6300S

6X3 PRESENTATION SWITCHER WITH SCALING

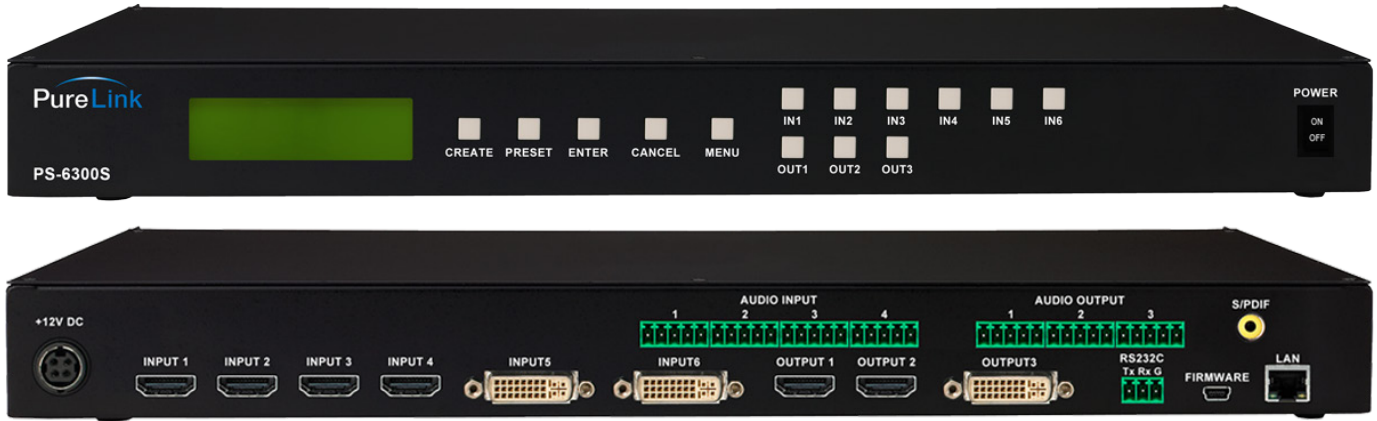

The **PS-6300S** is a six-input, high-performance presentation switcher and scaler for analog and digital video, unbalanced stereo, and S/PDIF audio signals. The PS-6300S features a built-in scaling engine for up/downscaling of any video signal, as well as PIP (picture-in-picture) technology, allowing any two video sources to be shown on one display. Together with PureLink's Don't Blink™ Seamless Switching Technology at every output, as well as user-friendly configuration and operation, the PS-6300S provides full flexibility and convenience in a video presentation environment.

SPECIFICATIONS

Input Video	4 HDMI Inputs, 2 DVI-I Inputs
Output Video	2 HDMI Outputs, 1 DVI-I Output
Input Audio	4 Balanced/Un-balanced analog audio (5-pin phoenix connector)
Output Audio	3 Balanced/Un-balanced analog audio (5-pin phoenix connector) 1 S/PDIF digital audio (LPCM-2Ch, Dolby Digital, or DTS only)
Multi format support DVI	DVI-U : Supports both analog and digital signals (HDMI, DVI, RGBHV, YPbPr)
Supported format	HDMI 1.3, DVI 1.0
HDCP Compliant	Yes
Operational Temperature	32° ~ 117° F (0° to 47° C)
Storage Temperature	- 40° ~ 158° F (-40° to 70° C)
Humidity	0 ~ 90% non-condensing
Power Supply	DC 12V, 5A, 60W
Dimension (W x D x H)	19"(W) x 8.0"(D) x 1.75"(H) 482.6 x 203.2 x 44.45 mm)
Weight	6.7 lbs (3.04 kg)



201.488.3232 | www.purelinkav.com

All brand names, product names and trademarks are the property of their respective owners. Certain trademarks, registered trademarks, and trade names may be used to refer to either the entities claiming the marks and names or their products. PureLink disclaims any proprietary interest in the marks and names of others. PureLink is not responsible for errors in typography or photography. ©2015 Dtrovision LLC | PureLink