

DATA SHEET

VOCIA® TTS-2

TEXT-TO-SPEECH ENGINE



The TTS-2 is a networked text-to-speech engine that supports the creation of browser-based announcements. The TTS-2 uses Ethernet-based control protocols in conjunction with CobraNet® to function within a Biamp® Vocia® system and constructs announcements using a set of user-defined templates. The TTS-2 interfaces with Rauland-Borg Nurse Call systems.

FEATURES

- Text-to-speech announcement creation via web interface
- Nurse Call Functionality Included
- Announcements in multiple languages and voices
- Includes 130 Voice Fonts
- User-defined templates
- Ability to interface with 3rd party control systems via IP (TTS-2 VTP)
- Status LED
- Rotary switches for unit identification
- Rack mountable (1RU)
- Vocia Message Server-1e (MS-1e) required for operation
- CE marked and RoHS compliant
- Covered by Biamp Systems' five-year warranty


ARCHITECTS & ENGINEERS SPECIFICATION

The text-to-speech engine shall be designed exclusively for use with Biamp Vocia systems. The text-to-speech engine shall be rack mountable in one rack space and shall provide conversion from text to voice announcements in multiple languages and voices. The text-to-speech engine shall support user-defined templates and send the resulting voice announcements digitally over CobraNet to the requested destinations. The text-to-speech engine shall feature a status LED and separate ports for TCP/IP control and CobraNet. The text-to-speech engine shall interface with Rauland-Borg Nurse Call Responder 5 systems. The text-to-speech engine shall be CE marked and shall be compliant with the RoHS directive. Warranty shall be five years. The text-to-speech engine shall be a Vocia Text-to-Speech engine TTS-2.

VOCIA TTS-2 SPECIFICATIONS

Network Connection:	RJ-45 with shielded Ethernet (CAT5, CAT5e, CAT6, or CAT7)	Environment:	
Power Consumption (100-240VAC 50/60Hz):	< 300 W	Ambient Operating Temperature Range:	32-113° F (0 – 45° C)
Overall Dimensions:		Humidity:	5 – 95% non-condensing
Height:	1.75 inches (44 mm)	Altitude:	0-10,000 Feet (0-3000 Meters) MSL
Width:	19 inches (483 mm)	Compliance:	FCC Part 15 Class A (USA)
Depth:	17.5 inches (444 mm)		CE marked (Europe)
Weight:	12 lbs. (5.4 kg)		UL listed (USA and Canada)
			RoHS Directive (Europe)

VOCIA TTS-2 BACK PANEL

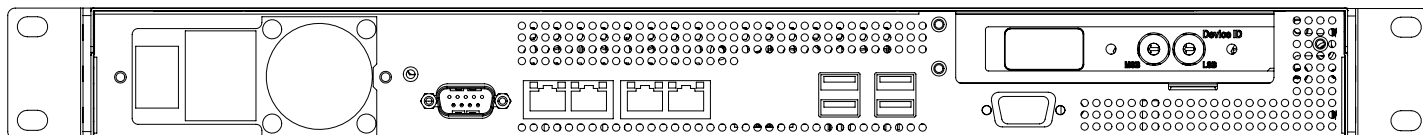

Biamp and Vocia are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.