




KRAMER

VP-16x18AK

16x18 Computer Graphics Video &
Balanced/Unbalanced Stereo Audio Matrix
Switcher

| VGA/UXGA - 15-pin HD | Ethernet - RJ-45

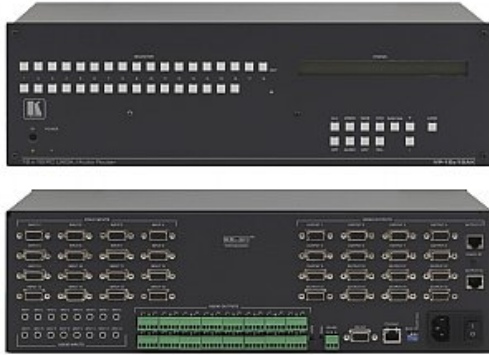

The VP-16x18AK is a high-performance matrix switcher for computer graphics video up to UXGA and unbalanced stereo audio signals. The unit can simultaneously switch any input to any or all of the 16 computer graphics and two twisted pair outputs

FEATURES

High Bandwidth - 420MHz (3dB)

HDTV Compatible

Kr-isp® Advanced Sync Processing - Ensures compatibility with a wide range of computers (even if the sync level is too low) by restoring the sync signal waveform. Kr-isp® advanced sync processing can be enabled or disabled

Multiple Memory Locations - Stores 12 multiple switches as presets to be recalled and executed when needed

Automatic Input Detection - An input lights green when a live connection is detected

Delayed Switching™ Mode - Glitchfree switching of nongenlocked sources by setting the transition time of a switch from 0 to 3.5 seconds

Audio Breakaway Switching

Audio-Follows-Video - Automatically switches the stereo audio signal with the video signal when switching the active input to the output

Audio Level Gain Controls - For unbalanced stereo inputs

Convenient Take Button - Executes multiple switches all at once

Front Panel Control Lockout

I-EDIDPro™ Kramer Intelligent EDID Processing™ - Intelligent EDID handling & processing algorithm ensures Plug and Play operation for HDMI systems

Flexible Control Options - Front panel buttons, IR remote with transmitter or optional remote extension cable, RS232 & RS485, Ethernet with Web browser

Standard 19" Rack Mount Size - 5U. Rack "ears" included



KRAMER

TECHNICAL SPECIFICATIONS

INPUTS:	16 UXGA on 15pin HD connectors, 16 unbalanced stereo audio on 3.5mm mini jacks
OUTPUTS:	16 UXGA on 15pin HD connectors, 16 balanced stereo audio on 5pin terminal block connectors, 2 TP on RJ45 connectors
MAX. OUTPUT LEVEL:	Video: 1.6Vpp; Audio: 9.6Vpp diff (12.8dBu)
BANDWIDTH (-3dB):	Video: 420MHz; Audio: 20kHz
DIFF. GAIN:	0.1% maximum
DIFF. PHASE:	0.05Deg. maximum
K-FACTOR:	Local output: 0.1%
S/N RATIO:	Video: 62dB to 5MHz; Audio: 83dB
CROSSTALK (all hostile):	Video: -35dB @ 100MHz; Audio: -68dB @ 1kHz
CONTROLS:	Volume: -105 to +30dB; bass: -15 to 15dB; treble: -20 to +20db
COUPLING:	Video: Local output: DC; CAT 5 output: AC; Audio: Local output: input=AC, output=DC; CAT 5 output: input=AC, output=AC
AUDIO THD + NOISE:	Local output: 0.031% @ 1kHz
AUDIO 2nd HARMONIC:	Local output: 0.003% @ 1kHz
POWER CONSUMPTION:	100240V AC, 44VA
OPERATING TEMPERATURE:	0° to +40°C (32° to 104°F)
STORAGE TEMPERATURE:	40° to +70°C (40° to 158°F)
HUMIDITY:	10% to 90%, RHL noncondensing
INCLUDED ACCESSORIES:	Power cord, rack "ears", RCIR3 IR Remote Control
OPTIONS:	External remote IR receiver cable
PRODUCT DIMENSION:	19" x 9.33 x 5U (43.6cm x 23.70cm 13.25cm) W, D, H
PRODUCT WEIGHT:	3.9kg (8.7lbs) approx
SHIPPING DIMENSION:	55.50cm x 34.20cm x 20.00cm (21.85" x 13.46" x 7.87") W, D, H
SHIPPING WEIGHT:	5.5kg (12.2lbs) approx

