



## VS-211UHD Quick Start Guide

This guide helps you install and use your **VS-211UHD** for the first time.

Go to <http://www.kramerav.com/downloads/VS-211UHD> to download the latest user manual (or scan the QR code) and check if firmware upgrades are available.

### Step 1: Check what's in the box


- ✓ VS-211UHD Ultra HD HDMI Auto Switcher
- ✓ 4 Rubber feet
- ✓ Kramer **RC-IR3** Infrared Remote Control Transmitter with batteries and user manual
- ✓ 1 Power cord supply (5V DC)
- ✓ 1 Quick start guide

### Step 2: Install the VS-211UHD

Attach the rubber feet and place on a table or mount the **VS-211UHD** in a rack (using an optional **RK-T2B** rack mount).

### Step 3: Connect inputs and outputs

Always switch OFF the power on each device before connecting it to your **VS-211UHD**. For best results, we recommend that you always use Kramer high-performance cables to connect AV equipment to the **VS-211UHD**.

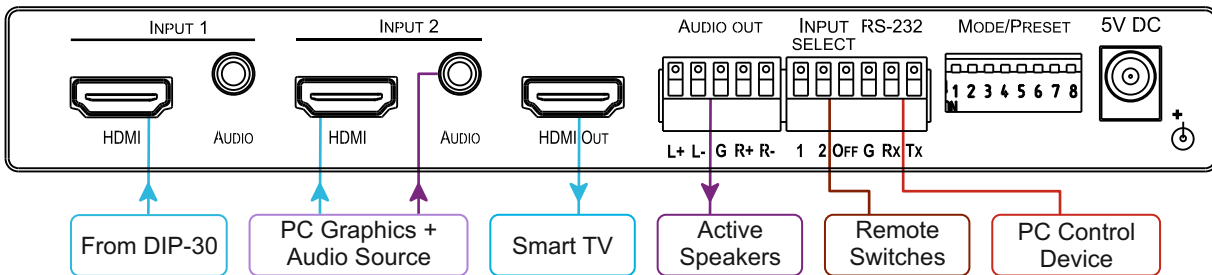


### Step 4: Connect the power

Connect the 5V DC power adapter to the **VS-211UHD** and plug the adapter into the mains electricity.



### Step 5: Set the DIP-switches

MODE/PRESET



DIP	Function	Off (Up)	On (Down)
1	Audio EDID	Pass audio EDID of sink	Limit to 2-CH LPCM
2	Color EDID	Pass deep color parameter of sink	Limit to RGB 8bpp
3	Lock EDID	Pass EDID of sink	Lock current display EDID
4	HDCP	Support HDCP	No HDCP support
5	Auto Embedding Port 1	Always embed Analog Audio In	Embed Analog Audio In, if DVI. Audio only embedded when input is DVI and 3.5mm connector is connected
6	Auto Embedding Port 2	Always embed Analog Audio In	Embed Analog Audio In, if DVI. Audio only embedded when input is DVI and 3.5mm connector is connected
7	Audio From	Source	ARC
8	Output Off Delay Settings	15sec default (configurable)	15min

