DV-HMSW4K-88

8x8 HDMI Matrix





Connect with Confidence

The DV-HMSW4K-88 8x8 HDMI Matrix routes eight HD sources to any eight HD outputs. The unit supports 1080p Full HD up to 4K plus all 3D formats, along with multichannel digital audio formats such as PCM, Dolby® True HD and DTS-HD® Master Audio™. Switching and other commands can be implemented using the front-panel push buttons, IR remote control, RS-232, or via TCP/IP.



- Supports resolutions up to 1080p@60HZ 48-bit deep color, 4k@30HZ
- Allows any source to be displayed on multiple displays at the same time
- Allows any HDMI display to view any HDMI source at any time
- PCM, Dolby TrueHD and DTS-HD master audio pass through HDMI output
- Multiple switching mode, push button, IR remote control, RS-232 control, and TCP/IP control
- Easy installation with rack-mounting ears
- Full 3D pass through.
- HDCP compliant
- Includes 9 IR receivers, 8 IR Transmitters and a handheld IR Remote Control
- Power Supply included

SPEGIFIGATIONS

• Bandwidth 6.75Gbps

- Video Input Connectors: 8x HDMI Type A,
- 19-pin, femaleVideo Output Connectors: 8x HDMl Type A,

Includes 9 IR receivers, 8 IR Transmitters,

handheld IR Remote Control and Power Supply

- Video Output Connectors: 8x HDMI Type A, 19-pin, female
- RS-232 serial port: DB-9, female
- TCP/IP Control: RJ-45, female
- IR control hard wired inputs and outputs:
 3.5mm stereo jack
- Rack-Mountable: 1 RU rack height, rack ears included
- Dimensions (W x D x H): 17.3" x 9.5" x 1.75", without feet
- Shipping Weight: 6 lbs.
- Operating Temperature: 32°F to 104°F
- Storage Temperature: -4°F to 140°F
- Power Supply: 12V/5A DC



244 Bergen Boulevard, Woodland Park, NJ 07424 Phone: 973.785.4347 · Fax: 973.785.4207


Order Desk: 1-800-332-FSR1

Web: www.fsrinc.com · E-mail: sales@fsrinc.com



DIMENSIONS

 \oplus

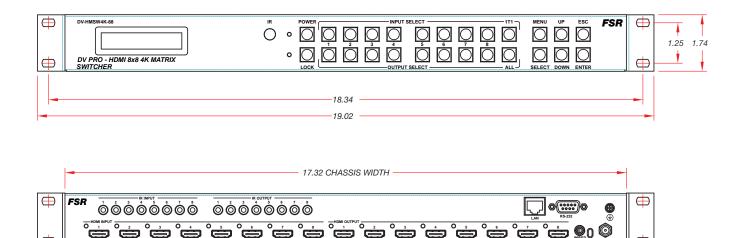

DEPTH INSIDE RACK IS APPROXIMATELY 9.25"

TYPICAL INSTALLATION

